



CERTIFICADO DE HOMOLOGACIÓN DE TIPO CE DE VEHÍCULOS DE MOTOR DE DOS O TRES
RUEDAS SEGÚN LA DIRECTIVA 2002/24/CE MODIFICADA HASTA LA 2006/120/CE

EC TYPE-APPROVAL CERTIFICATE FOR TWO OR THREE-WHEELED MOTOR
VEHICLES FOLLOWING DIRECTIVE 2002/24/EC AS LAST AMENDED BY 2006/120/EC

Comunicación sobre / *Communication concerning:*

- concesión de la homologación ⁽¹⁾ / *type-approval granted ⁽¹⁾*
- extensión de la homologación ⁽¹⁾ / *extension of type-approval ⁽¹⁾*
- denegación de la homologación ⁽¹⁾ / *refusal of type-approval ⁽¹⁾*
- retirada de homologación ⁽¹⁾ / *withdrawal of type-approval ⁽¹⁾*

de un tipo de vehículo en relación con la Directiva 2002/24/CE modificada hasta la 2006/120/CE / *of a type of vehicle with regard to Directive 2002/24/EC as last amended by 2006/120/EC*

Informe nº B1105014 del servicio técnico IDIADA con fecha 16.05.2011

Report No. B1105014 by technical service IDIADA date 16.05.2011

Número de homologación / *Type-approval No.:* e9*2002/24*0491*00

Motivos de la extensión / *Reason for extension:* ---

0. GENERALIDADES / *GENERAL*

- 0.1. Marca(s) (razón social del fabricante) / *Make(s) (trade name of the manufacturer):* JMSTAR, SHENKE, HUIBANG, JONWAY
- 0.2. Tipo / *Type:* MGY
- 0.2.1. Denominación(es) comercial(es) / *Commercial name(s):* ---
- 0.3. Medios de identificación del tipo, si están marcados en el vehículo / *Means of identification of type, if marked on the vehicle:* Marcado en la parte fija del VIN / *Marked in the fix part of VIN:* LJ4MGY
- 0.3.1. Emplazamiento de estas marcas / *Location of that marking:* Marcado en el lado derecho del chasis y en la placa de fabricante / *Marked on the right-hand side of the frame and on the manufacturer's plate*
- 0.4. Categoría ⁽²⁾ / *Category ⁽²⁾:* L1e
- 0.5. Nombre y dirección del fabricante del vehículo / *Name and address of the vehicle manufacturer:*
SHANGHAI JMSTAR MOTORCYCLE CO., LTD.
Fengjing Industry Area, Jinshan District, Shanghai,
201501 China

⁽¹⁾ Táchese lo que no proceda / *Delete where not applicable*

⁽²⁾ De conformidad con la clasificación establecida en el artículo 1 / *According to the classification introduced in Article 1*



e9*2002/24*0491*00

Certificado de homologación / *Type-approval certificate*

Página / *Page* 2/2

0.5.1. Nombre y dirección de la(s) planta(s) de montaje / *Name(s) and address(es) of assembly plants:*
SHANGHAI JMSTAR MOTORCYCLE CO., LTD.
Fengjing Industry Area, Jinshan District, Shanghai,
201501 China

El abajo firmante certifica que la descripción del fabricante que figura en la ficha adjunta del tipo de vehículo que se acaba de describir, del que el organismo expedidor de la homologación ha seleccionado una o varias unidades representativas, que ha(n) sido presentada(s) como prototipo de vehículo, es exacta y que los resultados de los ensayos adjuntos son aplicables al tipo de vehículo. / *The undersigned hereby certifies the accuracy of the manufacturer's description in the attached information document of the vehicle type described above, for which one of the several representative samples, selected by the competent approval authorities, has (have) been submitted as prototype(s) of the vehicle type and that the attached test results are applicable to the vehicle type.*

El tipo de vehículo cumple/no cumple ⁽¹⁾ los requisitos técnicos de las correspondientes Directivas específicas, según su última modificación, que figuran en el cuadro del anexo I de la Directiva 2002/24/CE. / *The vehicle type meets/does not meet ⁽¹⁾ the technical requirements of all relevant separate Directives (as last amended) listed in the table of Annex I to Directive 2002/24/EC.*

Se concede/deniega/retira la homologación ⁽¹⁾ / *The approval is granted/refused/withdrawn ⁽¹⁾*

Lugar / *Place*: Madrid

Fecha / *Date*: 06.06.2011

Firma / *Signature*:

EL SUBDIRECTOR GENERAL DE CALIDAD Y
SEGURIDAD INDUSTRIAL
Resolución P.D. 28-06-2004



Fdo.: Timoteo de la Fuente García

Se adjuntan / *Attachments*: Ficha de características, partes 1 y 2 (anexo II) / *Information document, Parts 1 and 2 (Annex II)*

Resultados de los ensayos (anexo VII) / *Tests results (Annex VII)*

Nombre de las personas autorizadas a firmar los certificados de conformidad, muestras de sus firmas e indicación del cargo en la empresa. / *Name(s) and specimen(s) of the signature of the persons authorised to sign the certificates of conformity and a statement of their position in the company.*

Un modelo de certificado de conformidad / *A model of certificate of conformity*

⁽¹⁾ Táchese lo que no proceda / *Delete where not applicable*



**RESULTADOS DE ENSAYOS (ANEXO VII) /
TEST RESULTS (ANNEX VII)**

1. Resultado de los ensayos sobre nivel sonoro / Results of sound level tests

Número de la Directiva de base y de la última modificación de la Directiva aplicable a la homologación. En el caso de una Directiva con dos o más etapas de aplicación, indíquese también la fase de aplicación. /
Number of the base Directive and latest amending Directive applicable to the approval. In the case of a Directive with two or more implementation stages, indicate also the implementation stage:

Directiva 97/24/9/II*2006/120/CE / Directive 97/24/9/II*2006/120/EC

Variante/Versión / Variant/Version : ---
En marcha / Moving dB(A) : ---
Estacionario / Stationary noise dB(A) : ---
al régimen de / at (min^{-1}) : ---

2. Resultados de los ensayos sobre emisiones de gases de escape /

Test results of exhaust emissions

Número de la Directiva de base y de la última modificación de la Directiva aplicable a la homologación. En el caso de una Directiva con dos o más etapas de aplicación, indíquese también la fase de aplicación. /
Number of the base Directive and latest amending Directive applicable to the approval. In the case of a Directive with two or more implementation stages, indicate also the implementation stage:

Directiva 97/24/5/I*2006/120/CE (EURO 2) / Directive 97/24/5/I*2006/120/EC (EURO 2)

Variante/Versión / Variant/Version : ---
2.1 Tipo I / Type I
CO (g/km) : ---
HC (g/km) ⁽²⁾ : ---
NOx (g/km) ⁽²⁾ : ---
HC + NOx (g/km) ⁽¹⁾ : ---
2.2 Tipo II / Type II
CO (g/min) ⁽¹⁾ : ---
HC (g/min) ⁽¹⁾ : ---
CO (% vol) al ralentí normal /
CO (% vol) at normal idle speed ⁽²⁾ : ---
Especifíquese el ralentí /
Specify the idle speed ⁽²⁾⁽³⁾ : ---
CO (% vol) al ralentí alto /
CO (% vol) at high idle speed ⁽²⁾ : ---
Especifíquese el ralentí /
Specify the idle speed ⁽²⁾⁽³⁾ : ---
Temperatura del aceite del motor /
Engine oil temperature ⁽²⁾⁽⁴⁾ : ---

3. Motor de encendido por compresión / Compression ignition engine

Variante/ versión / Variant/ version : ---
Valor corregido del coeficiente de absorción /
Corrected values of absorption coefficient (m^{-1}) : ---



⁽¹⁾ Únicamente para ciclomotores y para cuatriciclos ligeros tal como se definen en la letra a) del apartado 3 del artículo 1 / *Only for mopeds and for light quadricycles as defined in Article 1, paragraph 3(a)*

⁽²⁾ Únicamente para motocicletas y vehículos de motor de tres ruedas y para cuatriciclos tal como se definen en la letra b) del apartado 3 del artículo 1. / *Only for motorcycles and motor tricycles and for quadricycles as defined in Article 1, paragraph 3(b)*

⁽³⁾ Indíquense los márgenes de tolerancia en la medición. / *Mention the measurement tolerance*

⁽⁴⁾ Aplicable sólo a motores de cuatro tiempos. / *Applicable for four-stroke engines only*

APÉNDICE / APPENDIX 93/93/MGY

MASAS Y DIMENSIONES / MASSES AND DIMENSIONS

Directive 93/93*2004/86/EC

Página / Page 1/1

IDENTIFICACIÓN DEL VEHÍCULO PRESENTADO AL ENSAYO / IDENTIFICATION OF THE VEHICLE SUBMITTED FOR TEST

Fabricante / *Manufacturer* : SHANGHAI JMSTAR MOTORCYCLE CO., LTD.
Fengjing Industry Area, Jinshan District,
201501 Shanghai, China

Marca / *Make* : JMSTAR

Tipo / *Type* : MGY

Categoría / *Category* : L1e

Nº de bastidor / *Frame number* : PROTOTYPE

DIMENSIONES / DIMENSIONS

Longitud / *Length* = 1700 ≤ 4000 mmCORRECT

Anchura / *Width* = 660 ≤ 1000 mmCORRECT

Altura / *Height* = 1060 ≤ 2500 mm (Version A)CORRECT

Altura / *Height* = 1085 ≤ 2500 mm (Version B)CORRECT

Altura / *Height* = 1090 ≤ 2500 mm (Version C/D/E)CORRECT

MASAS / MASSES

Masa máxima técnicamente admisible (PTMA) / *Maximum technically admissible mass* : 254 kg

Masa en orden de marcha (POM) / *Mass in running order* : 77 kg (Variant C/E/2/4/N/W)

Masa en orden de marcha (POM) / *Mass in running order* : 99 kg (Variant D/F/3/5/P/R)

Carga útil declarada por el fabricante (PU) /
Maximum payload declared by the manufacturer : 254 – 77 – 75 = 102 kg
(Variant C/E/2/4/N/W)

Carga útil declarada por el fabricante (PU) /
Maximum payload declared by the manufacturer : 254 – 99 – 75 = 80 kg
(Variant D/F/3/5/P/R)

Lugar del ensayo / *Test place* : Taizhou, China

Fecha del ensayo / *Test date* : 10.05.2011



J. Carbo Picas, Ing. Téc. Ind.
INGENIERO DE ENSAYOS
TEST ENGINEER
Exp. B1105014

Report No. B1105014

* LOS RESULTADOS PRESENTADOS SE REFIEREN EXCLUSIVAMENTE A LA MUESTRA ENSAYADA
THE RESULTS PRESENTED REFER ONLY TO THE TESTED SAMPLE

* QUEDA TERMINANTEMENTE PROHIBIDA LA REPRODUCCIÓN PARCIAL DE ESTE INFORME SIN EL PERMISO EXPRESO DE IDIADA
THE PARTIAL REPRODUCTION OF THIS REPORT WITHOUT THE PERMISSION OF IDIADA IS COMPLETELY FORBIDDEN

A. INFORMATION RELATING JOINTLY TO MOPEDS, MOTORCYCLES, MOTOR TRICYCLES AND QUADRICYCLES

0. General

0.1. Make: **JONWAY, SHENKE, HUIBANG, JMSTAR**

0.2. Type: **MGY**

Variants:

C / D (45 km/h, 1500W, Li-ion / 1500W, Silicone)

E / F (45 km/h, 2000W, Li-ion / 2000W, Silicone)

2 / 3 (25 km/h, 1500W, Li-ion / 1500W, Silicone)

4 / 5 (25 km/h, 2000W, Li-ion / 2000W, Silicone)

N / P (30 km/h, 1500W, Li-ion / 1500W, Silicone)

W / R (30 km/h, 2000W, Li-ion / 2000W, Silicone)

Versions: **A, B, C, D, E**

0.2.1. Commercial name: **N.A.**

0.3. Means of type identification if stated on vehicle:

From 4th and 6th digits of the VIN number

0.3.1. Location of that means of identification:

See the drawing of MGY-13

0.4. Vehicle category: **L1e**

0.5. Name and address of manufacturer:

SHANGHAI JMSTAR MOTORCYCLE CO., LTD.

Fengjing industry area, Jinshan district Shanghai 201501 China

0.5.1. Name(s) and address(es) of assembly plants:

SHANGHAI JMSTAR MOTORCYCLE CO., LTD.

Fengjing industry area, Jinshan district Shanghai 201501 China

0.6. Name and address of manufacturer's authorized representative, if any: **N.A.**

0.7. Location and method of affixing statutory inscriptions to the chassis:

See the drawing of MGY-13

0.7.1. The serial numbering of the type begins with No. : **LJ4MGY???00000001**

0.8. Position and method of affixing the component type-approval mark for components and separate technical units:

All the approved devices are marked with their homologation numbers and to erase them is not feasible.

IBIADA
Exp.n.: B1105014

1. General arrangement of vehicles:

1.1. Photos and/or drawings of a typical vehicle:

See the drawing of MGY-01-A, MGY-01-B, MGY-01-C, MGY-01-D, MGY-01-E

1.2. Dimensional drawing of the complete vehicle:

See the drawing of MGY-02-A, MGY-02-B, MGY-01-C, MGY-01-D, MGY-01-E, MGY-03

1.2.1. Wheelbase:

1225 mm

1.3. Number of axles and wheels (where appropriate, number of crawler tracks or belts):

Number of axles : **2**

Number of wheels : **2**

1.4. Position and arrangement of engine:

See the drawing of MGY-04

1.5. Number of seating positions: **1 (Variant:2/3/4/5/N/P/W/R) , 2 (Variant:C/D/E/F)**

1.6. Hand of drive – left or right: **N.A**

1.6.1. Vehicle is equipped to be driven in right-hand or left-hand rule of the road traffic:

Left / Right-hand

2. Masses (in kg)

2.0. Unladen mass:

77 kg (Variant C/E/2/4/N/W), 99 kg (Variant D/F/3/5/P/R)

2.1. Mass of vehicle in running order:

77 kg (Variant C/E/2/4/N/W), 99 kg (Variant D/F/3/5/P/R)

2.1.1. Distribution of that mass between the axles:

Front axle : 34 kg (Variant C/E/2/4/N/W), 41 kg (Variant D/F/3/5/P/R)

Rear axle : 43 kg (Variant C/E/2/4/N/W), 58 kg (Variant D/F/3/5/P/R)

2.2. Mass of vehicle in running order, together with rider:

152 kg (Variant C/E/2/4/N/W), 174 kg (Variant D/F/3/5/P/R)

İİİAĐA

Exp.n.: B1105014

- 3.3. Electric traction motor: **64V2000W (Variant E/F/4/5/W/R)**
64V1500W (Variant C/D/2/3/N/P)
 - 3.3.1 Type(winding, excitation): **Winding**
 - 3.3.1.1 Maximum continuous rated power: **2000 W (Variant E/F/4/5/W/R),**
1500 W (Variant C/D/2/3/N/P)
 - 3.3.1.2 Operating voltage: **64 V**
 - 3.3.2 Battery:
 - Variant C/E/2/4/N/W: Li-ion(Type:LFP20AHA)**
 - Variant D/F/3/5/P/R: Silicone(Type:6-DZM-20)**
 - 3.3.2.1 Number of cells: **21 (Variant C/E/2/4/N/W), 4 (Variant D/F/3/5/P/R)**
 - 3.3.2.2 Mass: **21*0.75kg (Variant C/E/2/4/N/W), 4*9.5kg (Variant D/F/3/5/P/R)**
 - 3.3.2.3 Capacity: **20Ah**
 - 3.3.2.4 Location: **See the drawing of MGY-05**
 - 3.4. Other motors or combinations of motors (specific information concerning the parts of those motors): **N.A.**
 - 3.5. Cooling system temperatures permitted by the manufacturer: **N.A.**
 - 3.6. Lubrication system: **N.A.**
 - 4. Transmission
 - 4.1. Diagram of transmission system:
 - See the drawing of MGY-04**
 - 4.2 Type (mechanical, hydraulic, electrical, etc):
 - Mechanical**
 - 4.3. Clutch (type): **N.A.**
 - 4.4. Gearbox
 - 4.4.1. Type:**N.A.**
 - 4.4.2. Method of selection: **N.A.**
 - 4.5. Gear ratios: **N.A.**
 - 4.5.1. Brief description of the electrical and / or electronic components used in the transmission: **N.A.**

4.6 Maximum speed of vehicle and gear in which it is reached (in km/h)

45 km/h (Variants C, D, E, F), 30 km/h (Variants N,P,W,R), 25 km/h (Variants 2,3,4,5)

4.7. Speedometer:

4.7.1. Make(s):

JONWAY

4.7.2. Type(s):

MGY-YB and MGY-YB-1 and MGY-YB-2

4.7.3. Photographs and/or drawings of the complete system:

See the drawing of MGY-06-A and MGY-06-B and MGY-06-C/D and MGY-06-E

4.7.4. Speed range displayed:

See the drawing of MGY-06-A and MGY-06-B and MGY-06-C/D and MGY-06-E

4.7.5. Tolerance of the measuring mechanism of the speedometer:

0~+5%

4.7.6. Technical constant of the speedometer:

1:1400

4.7.7. Method of operation and description of the drive mechanism:

A gear, connect with front wheel, transfer the rotation to the rotor, by a sheathed Cable, and with a rotating torque, to drive pointer

4.7.8. Overall transmission ratio of the drive mechanism:

Pinion: Warm =15 : 8

5. Suspension

5.1. Drawing of suspension arrangement:

See the drawing of MGY-07, MGY-08

5.1.1. Brief description of the electrical and/or electronic components used in the suspension:

N.A.

5.2. Tyres (category, dimensions and maximum loading) and rims (standard type):

	Dimension	Max.loading	Category	Rims
Front	3.50-10	51	J	2.15 X 10
Rear	3.50-10	51	J	2.15 X 10

5.2.1. Nominal rolling circumference:

3.50-10 : Front: 1307 mm Rear: 1307 mm

5.2.2. Tyre pressures recommended by the manufacturer:

Front tyre: 200 kPa
Rear tyre: 220 kPa

5.2.3. Tyre / wheel combinations: **N.A.**

5.2.4. Minimum-speed category symbol compatible with the theoretical maximum design speed of the vehicle: **B**

5.2.5. Minimum load-capacity index with the maximum load on each tyre:

Front: 24 rear: 45

5.2.6. Categories of use compatible for the vehicle:

Normal

6. Steering

6.1. Steering gear and control

6.1.1. Type of gear:

Direct system with coaxial tube steering on bearing

6.1.2. Brief description of the electrical and / or electronic components used in the steering system:

N.A.

7. Braking

7.1. Diagram of braking devices:

See the drawing of MGY-09 & MGY-10

7.2. Front and rear brakes :

**Front: disc
Rear : drum**

7.2.1. Make(s):

**Front : DONGRI
Rear : HUAFEI**

7.2.2. Type(s):

**Front : disc (Ø155 mm)
Rear : drum (Ø110 mm)**

7.3. Drawing of parts of the brake system

See the drawing of MGY-09 and MGY-10

7.3.1. Shoes and/or pads:

See the drawing of MGY-09 and MGY-10

7.3.2. Linings and/or pads (Indicate make, grade of material or identification mark):

See the drawing of MGY-09 and MGY-10

7.3.3. Brake levers and/or pedals

**Front brake: Lever, See the drawing of MGY-09
Rear brake: Lever, See the drawing of MGY-10**



7.3.4. Hydraulic reservoirs (where applicable):

**Front: Lever, See the drawing of MGY-09
Rear: N.A.**

7.4. Other devices (where applicable): drawing and description: **N.A.**

7.5. Brief description of the electrical and / or electronic components used in the braking system:

Both brake levers have electric wire to controller, the wire will automatically stop the electric currency to the motor through controller when being braked.

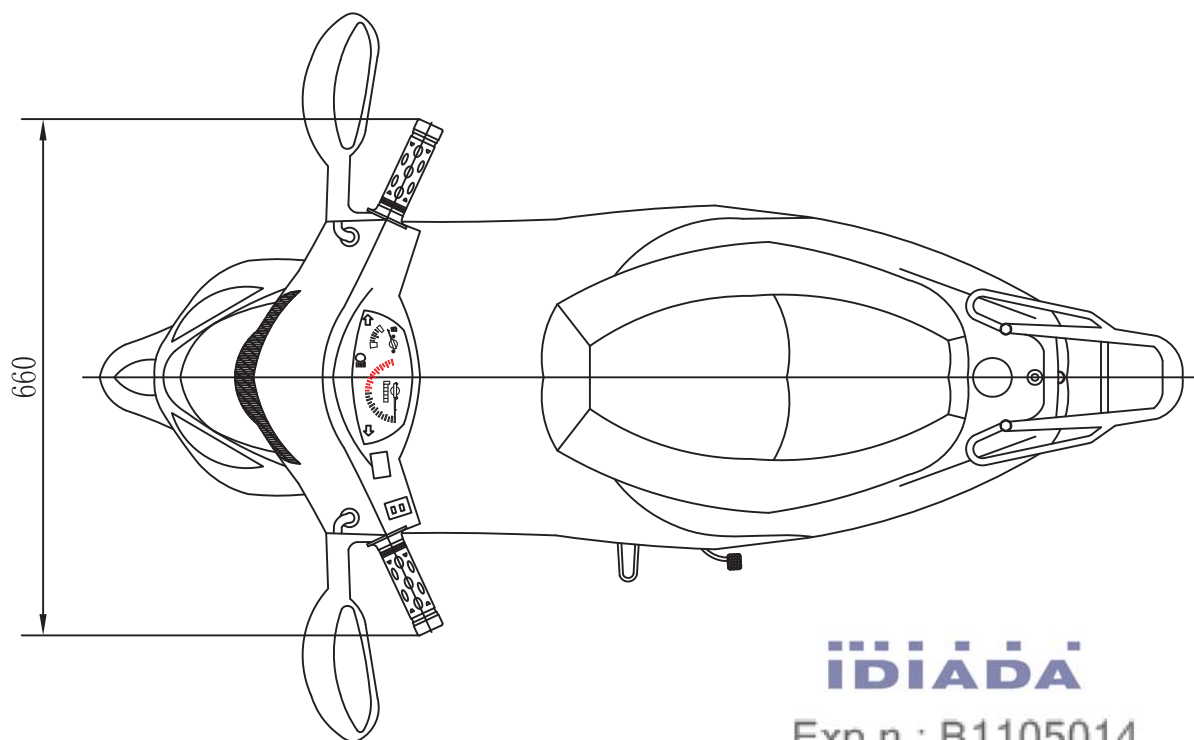
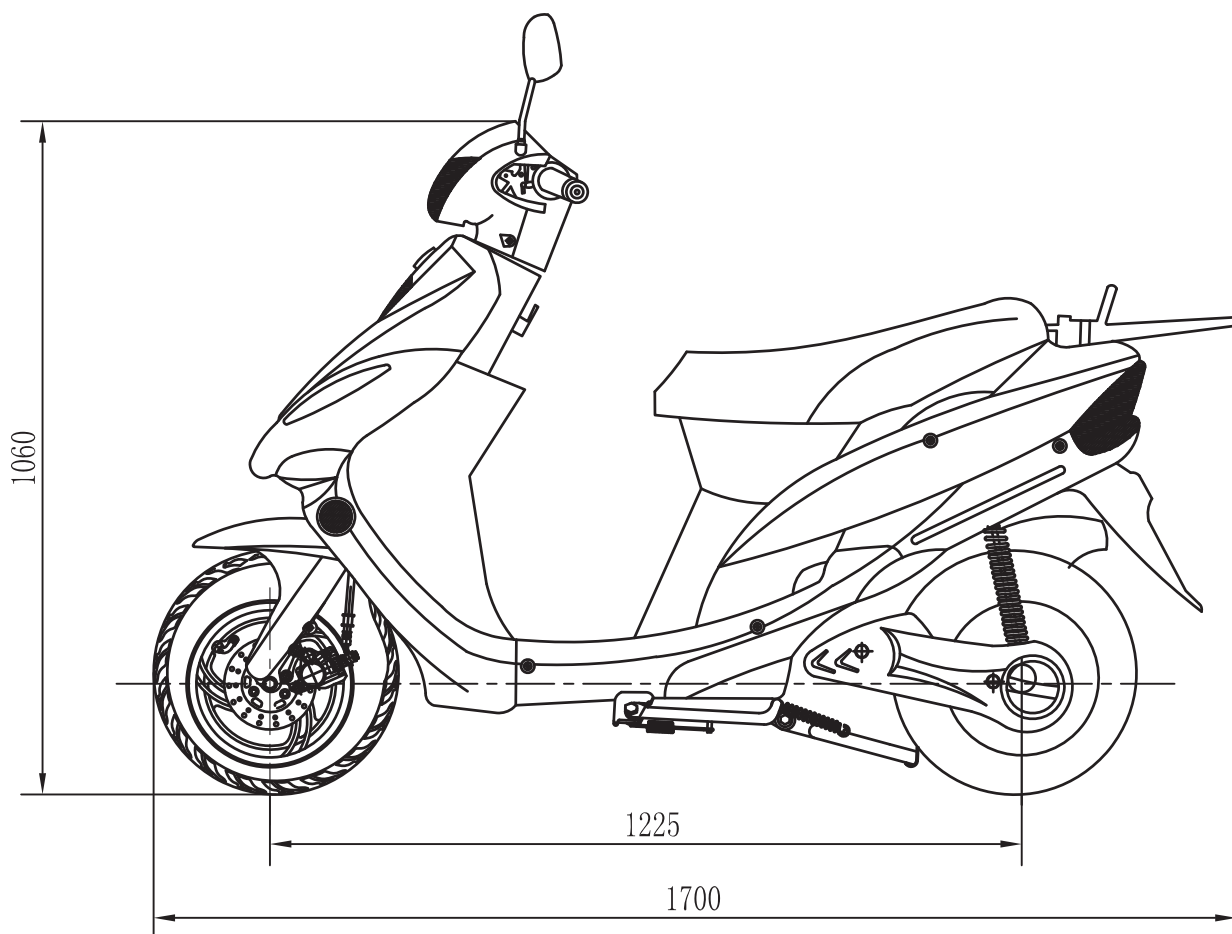


IDIADA
Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co., Ltd

MGY-02-A

Dimension measured on vehicle

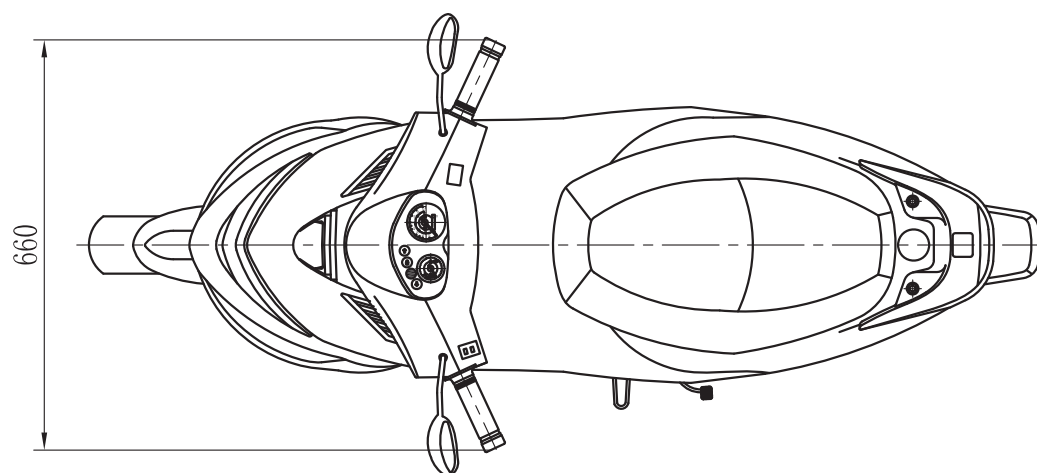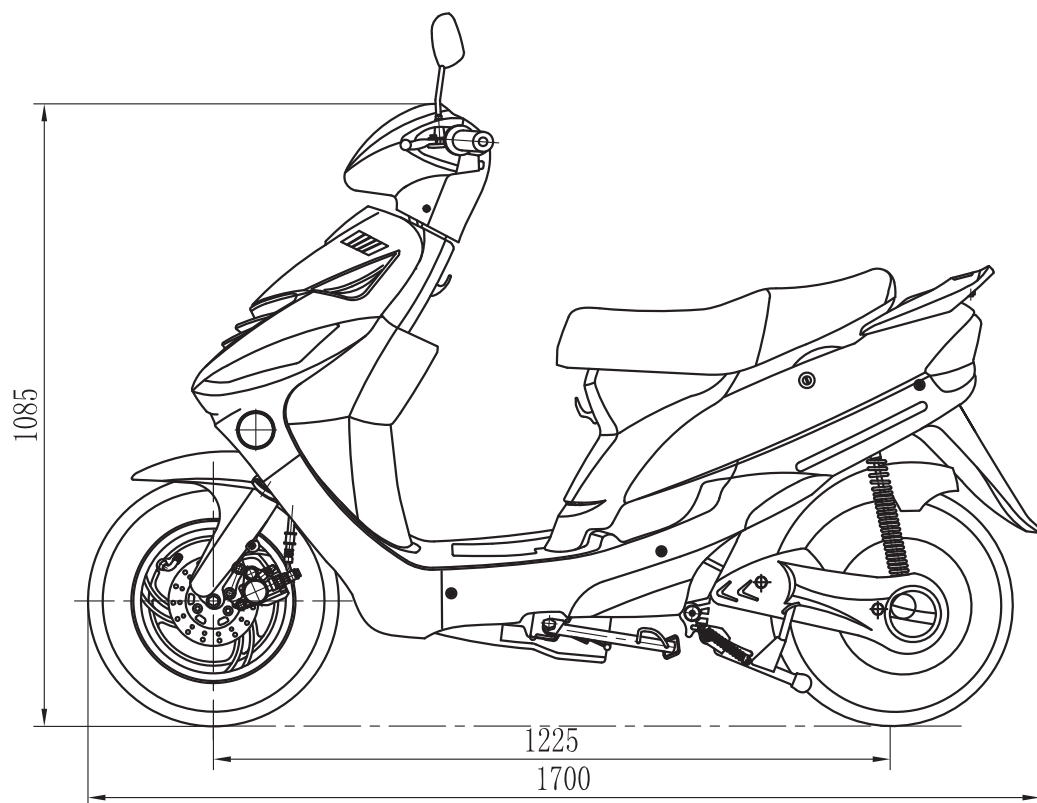



IDIADA

Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co., Ltd

MGY-02-B

Dimension measured on vehicle

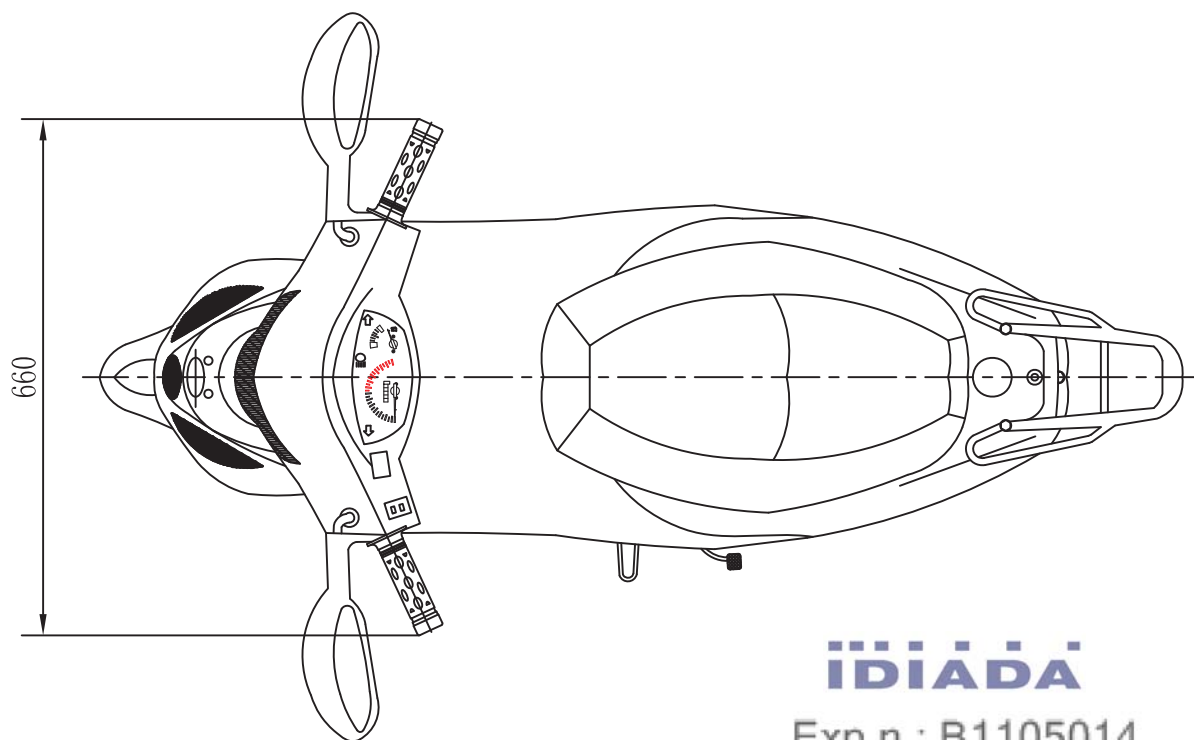
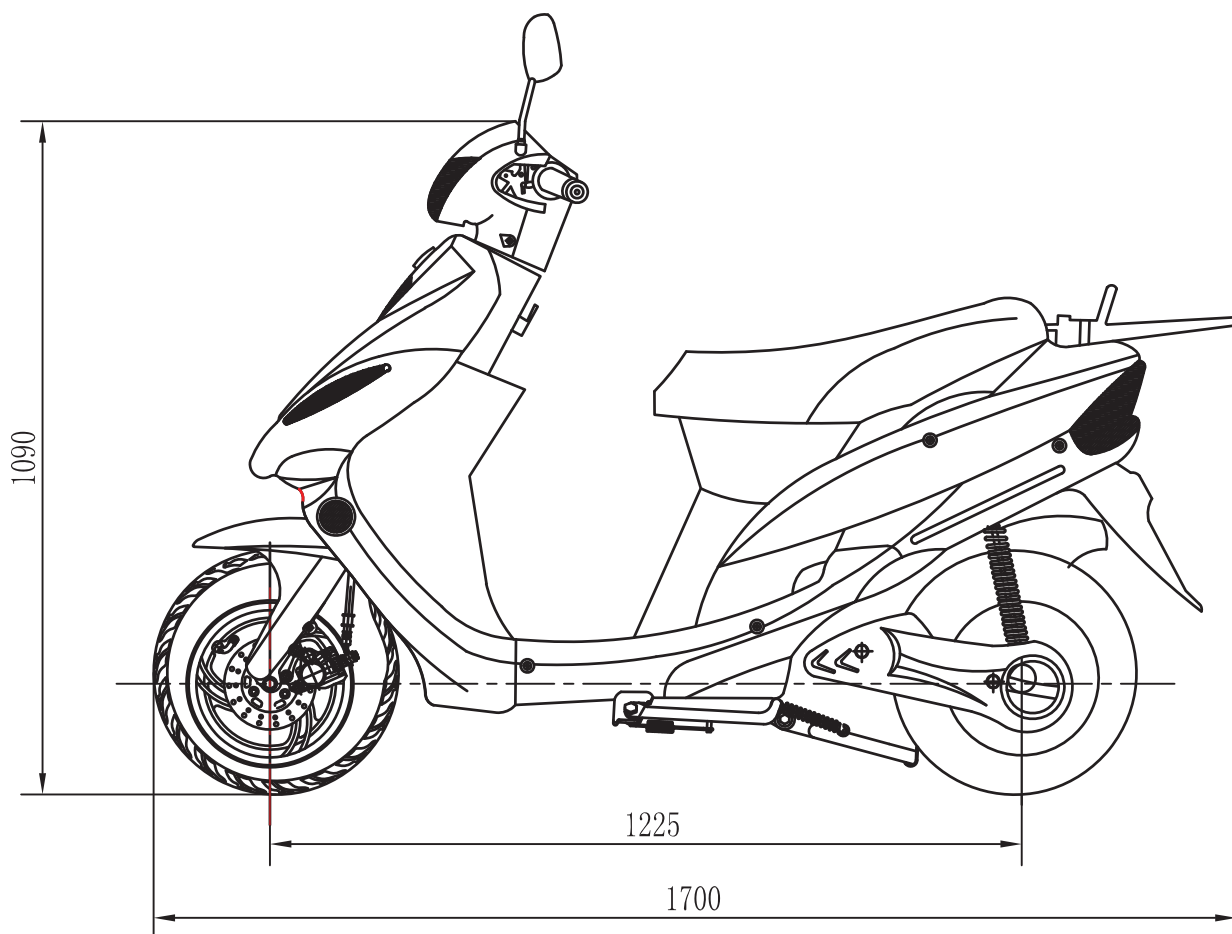


IDIADA
Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co., Ltd

MGY-02-C

Dimension measured on vehicle

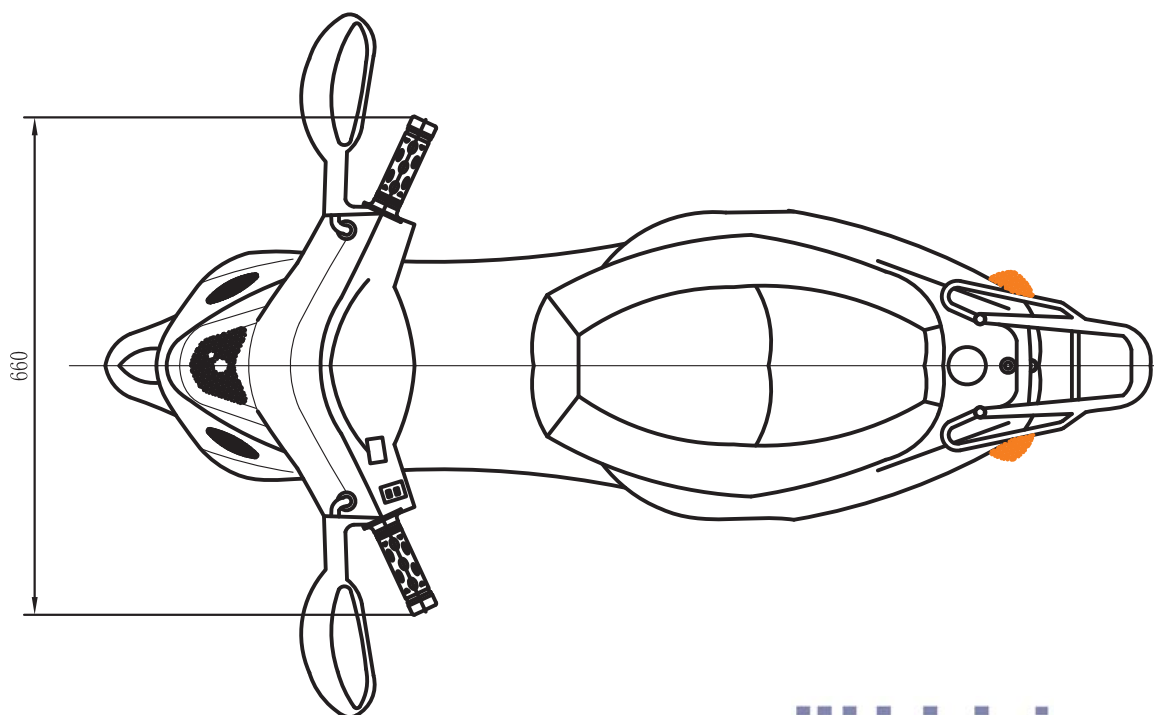
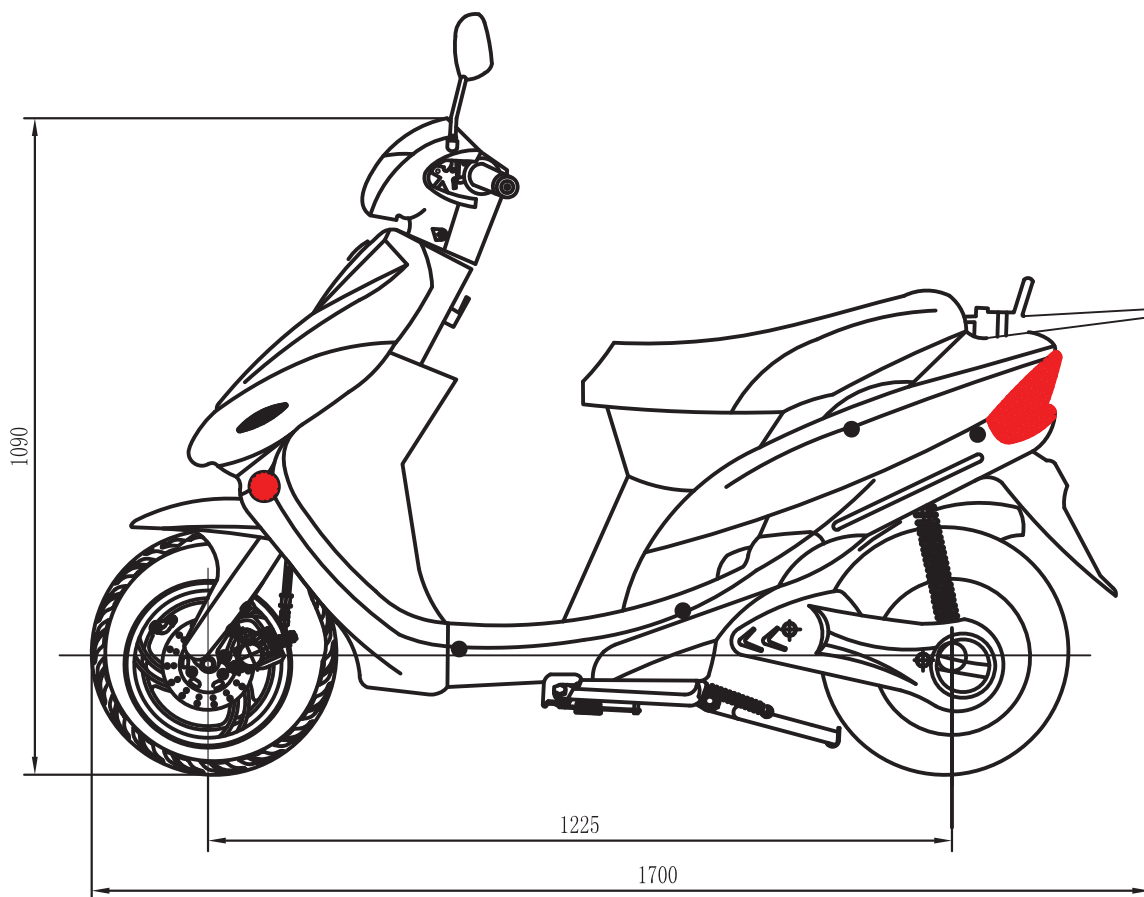


iDiADA
Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co., Ltd

GY-02-D

Dimension measured on vehicle


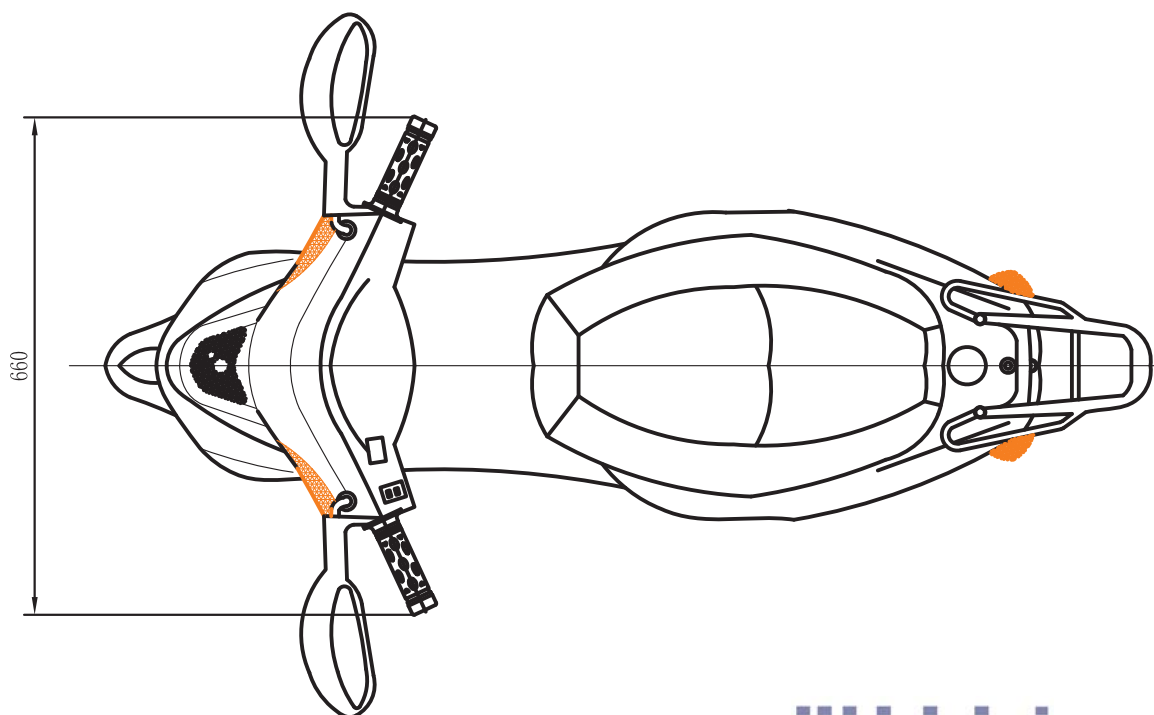
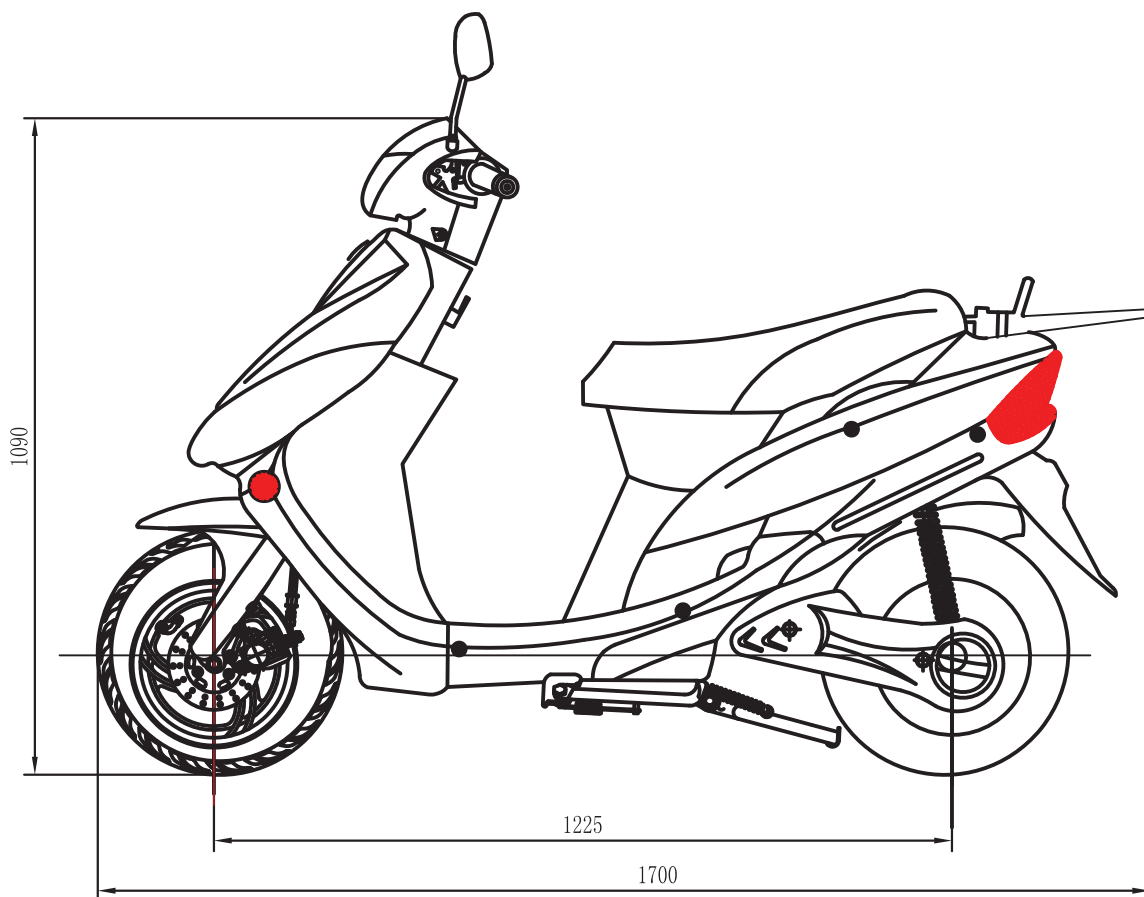


iDiADA
Exp.n.: B1105014



Shanghai Jmstar Motorcycle Co.,Ltd

GY-02-E

Dimension measured on vehicle

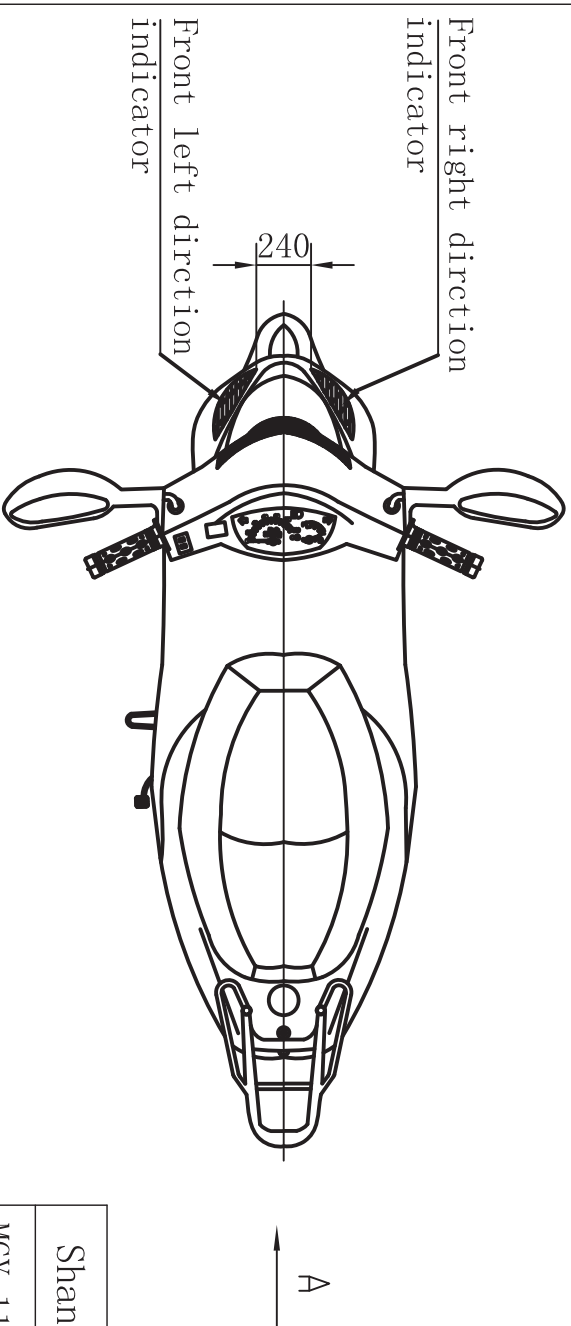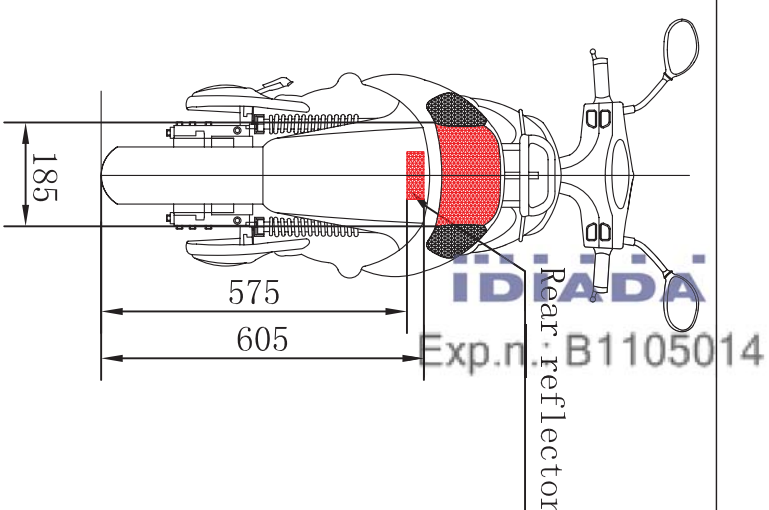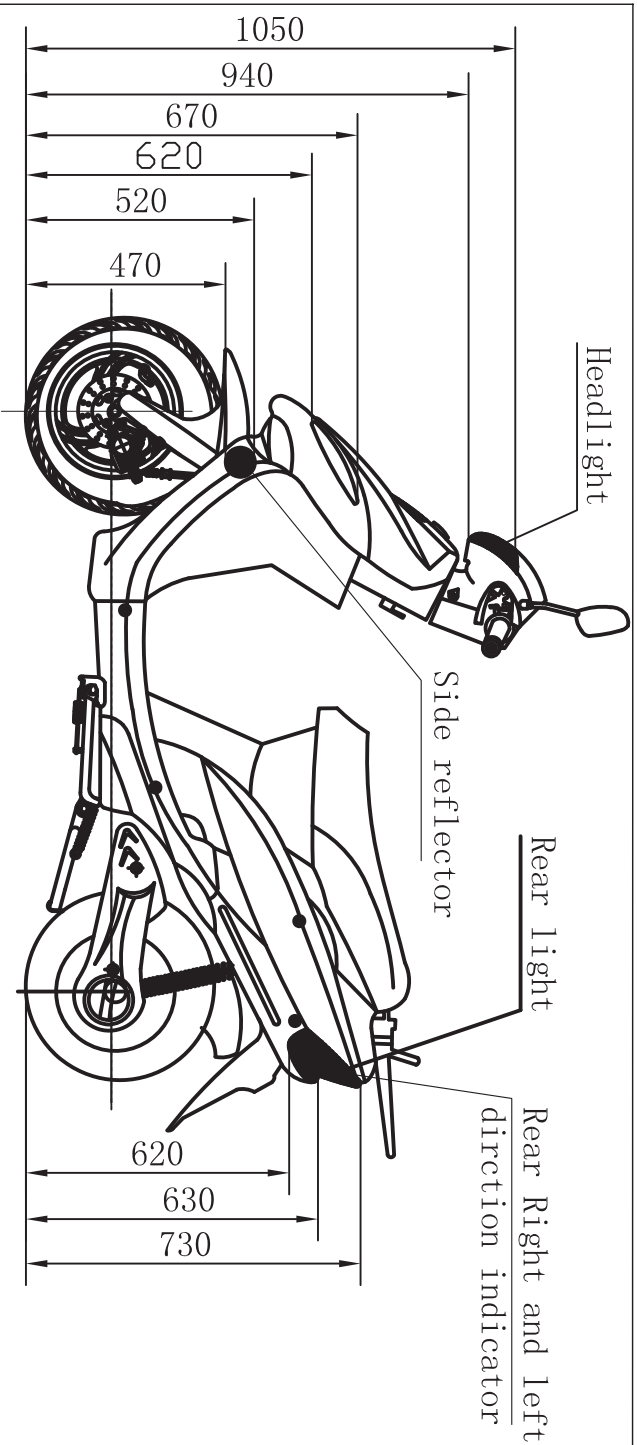

A direction


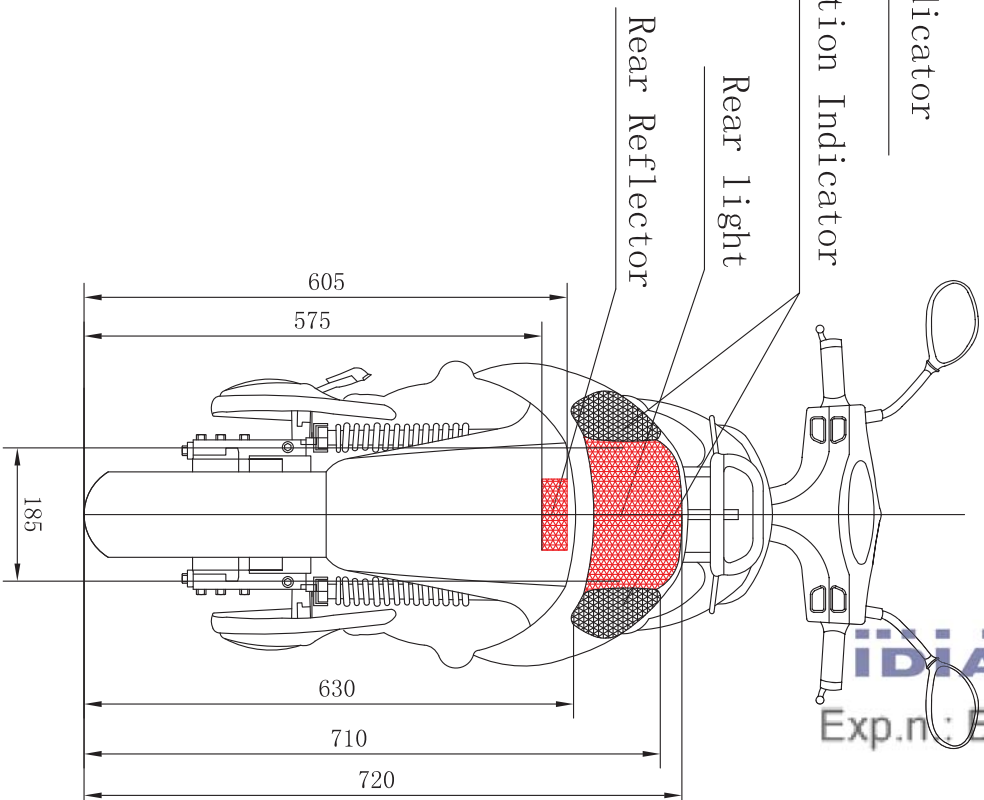
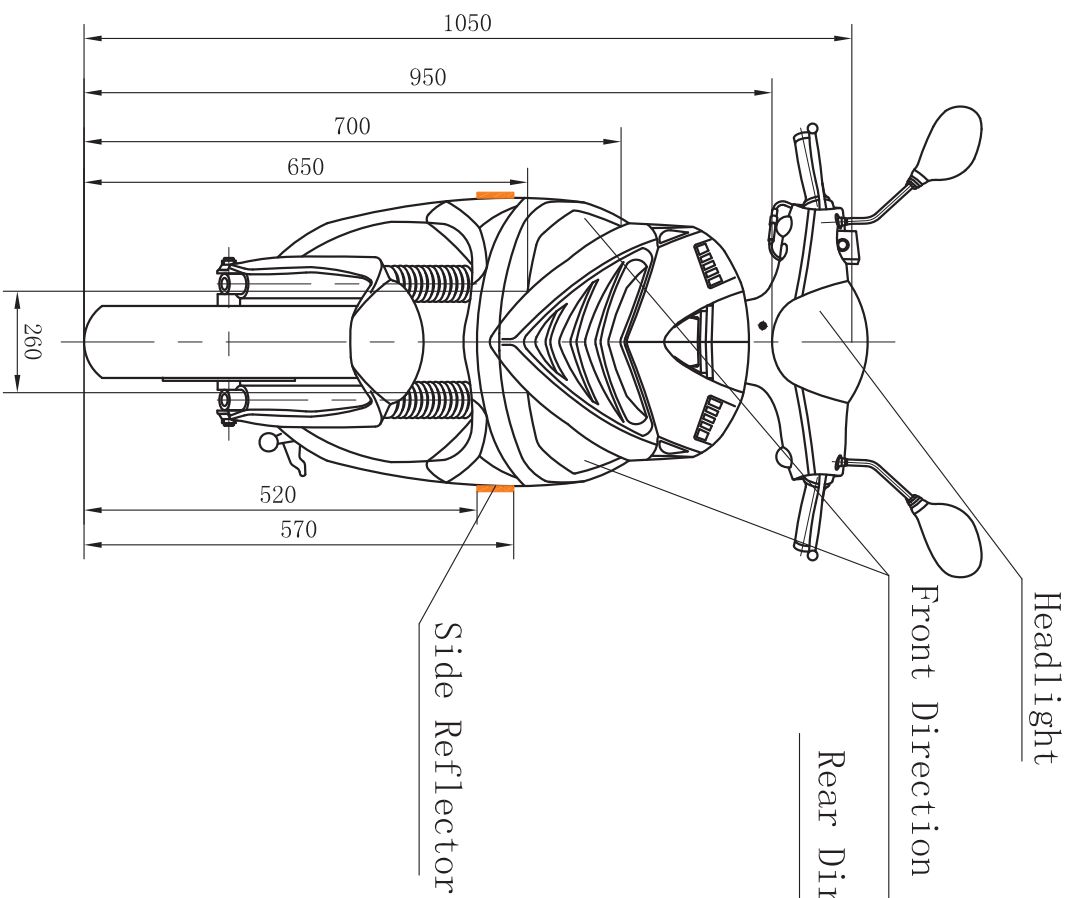


Exp.n: B1105014





Shanghai Jmstar Motorcycle Co., Ltd





MGY-11-B

Location of lights

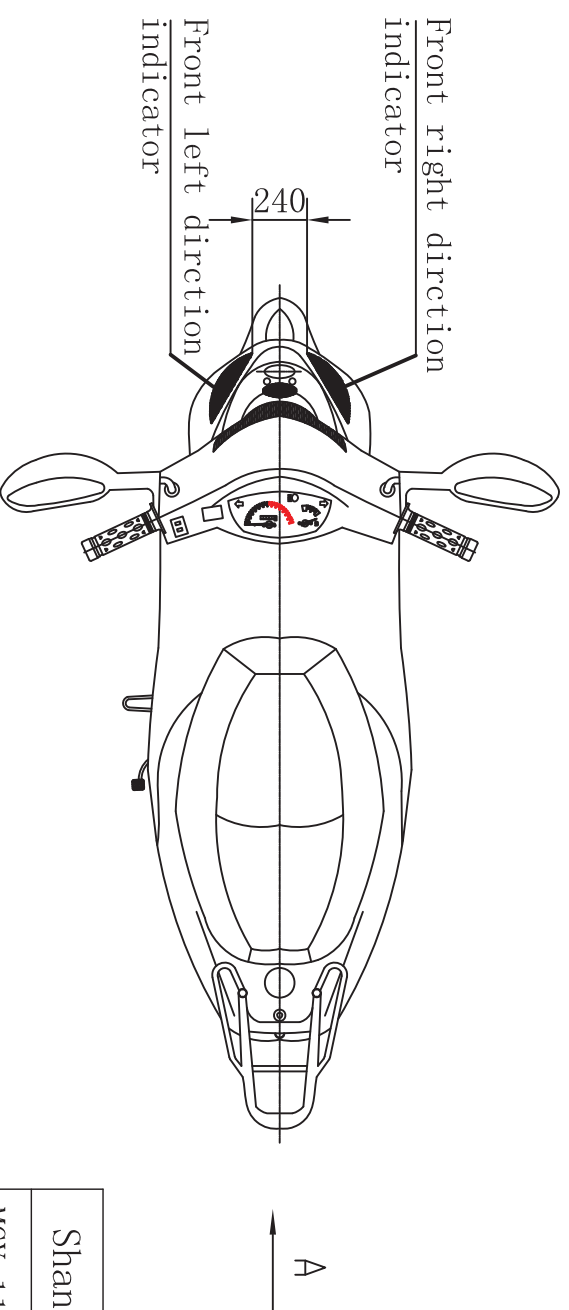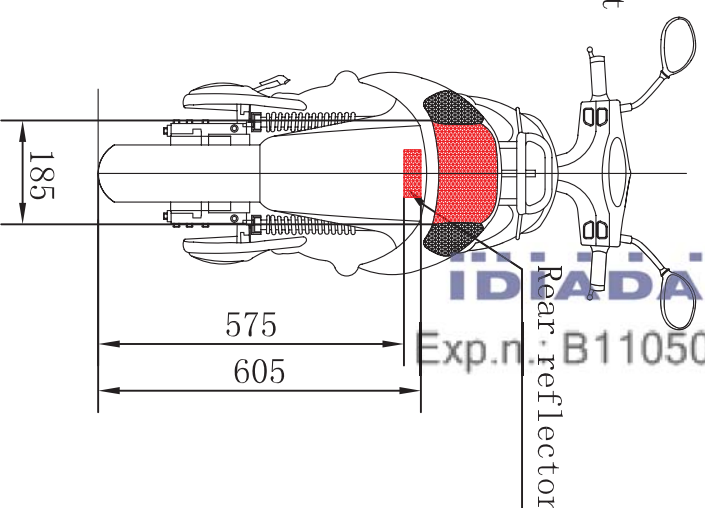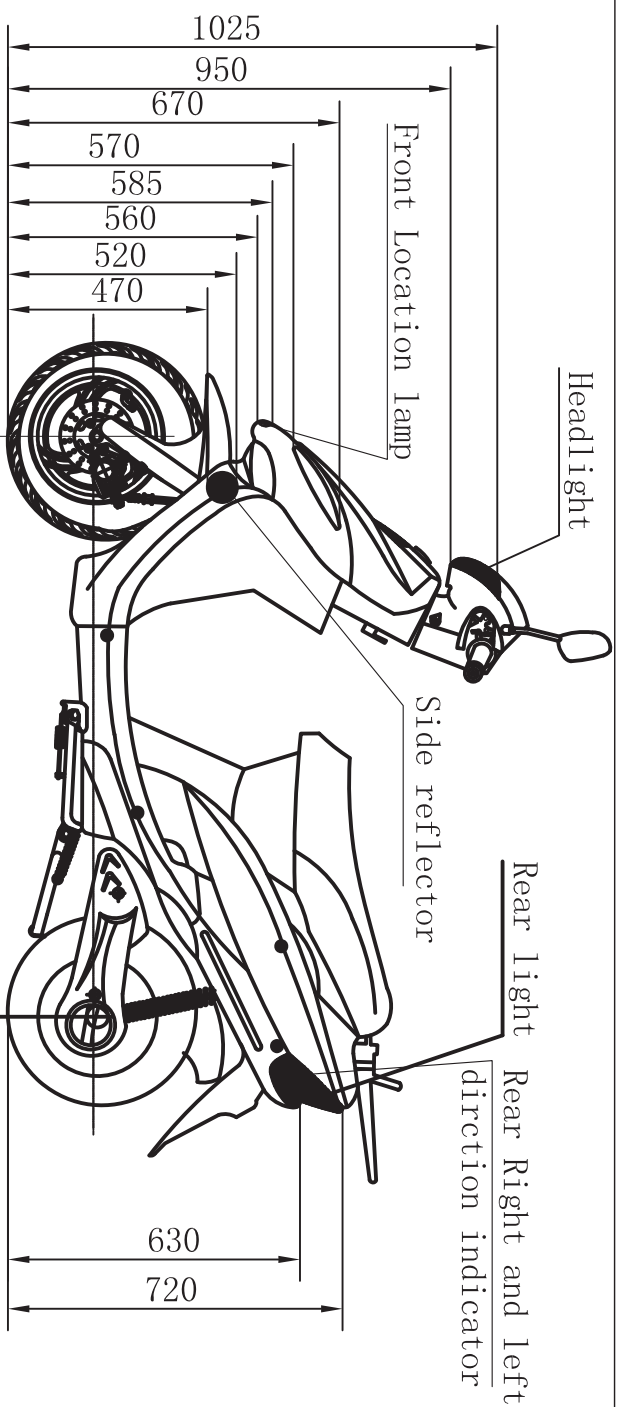


A direction

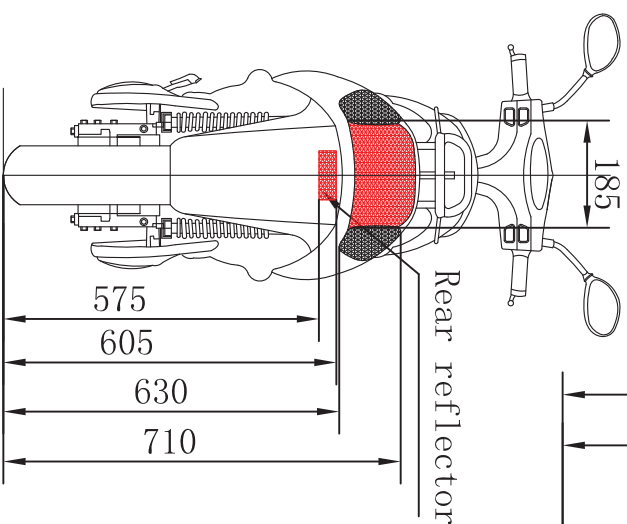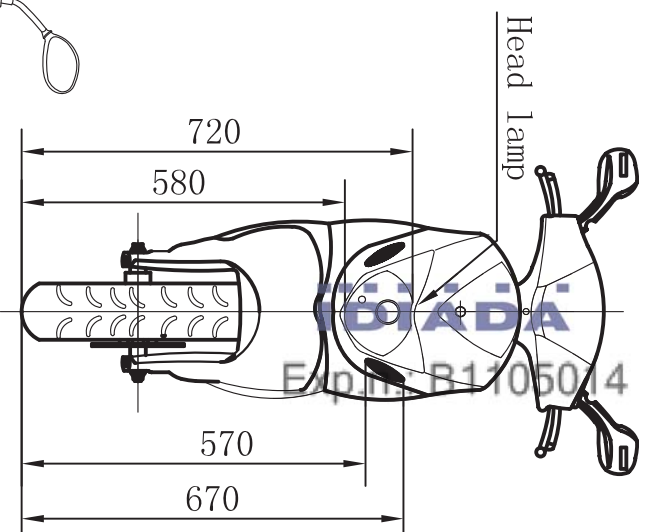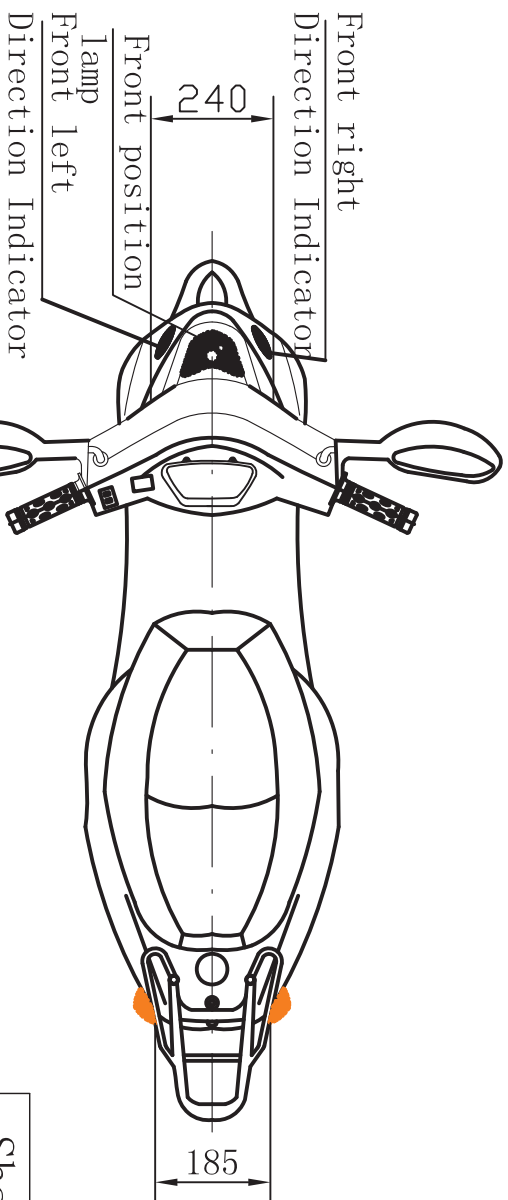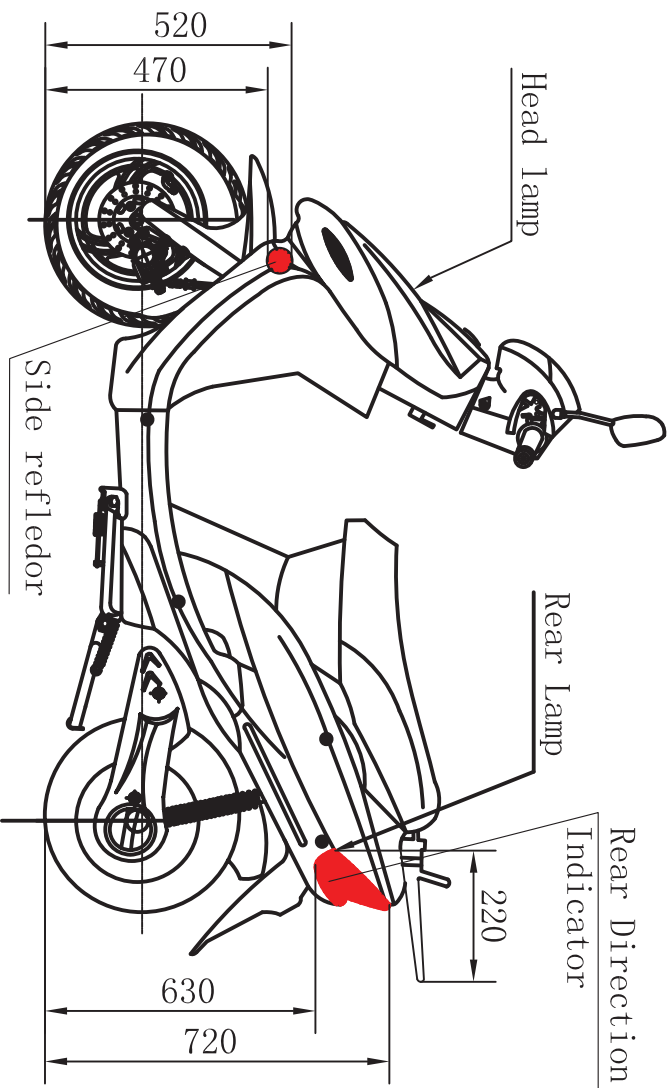

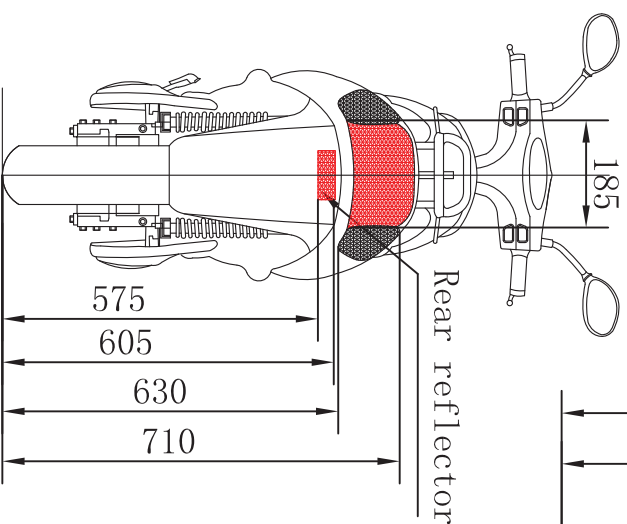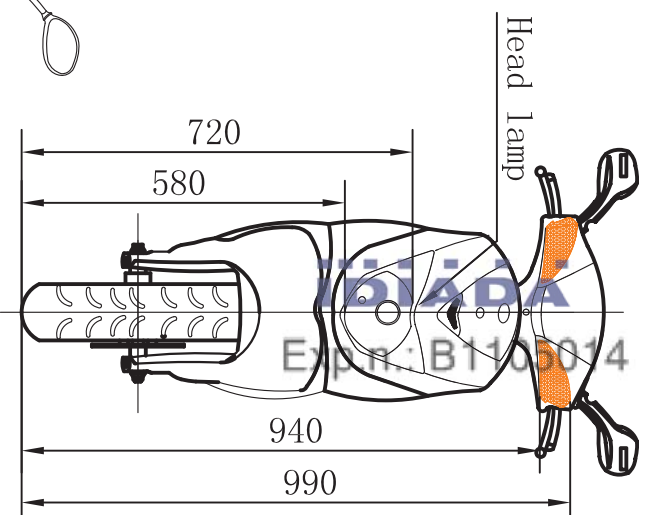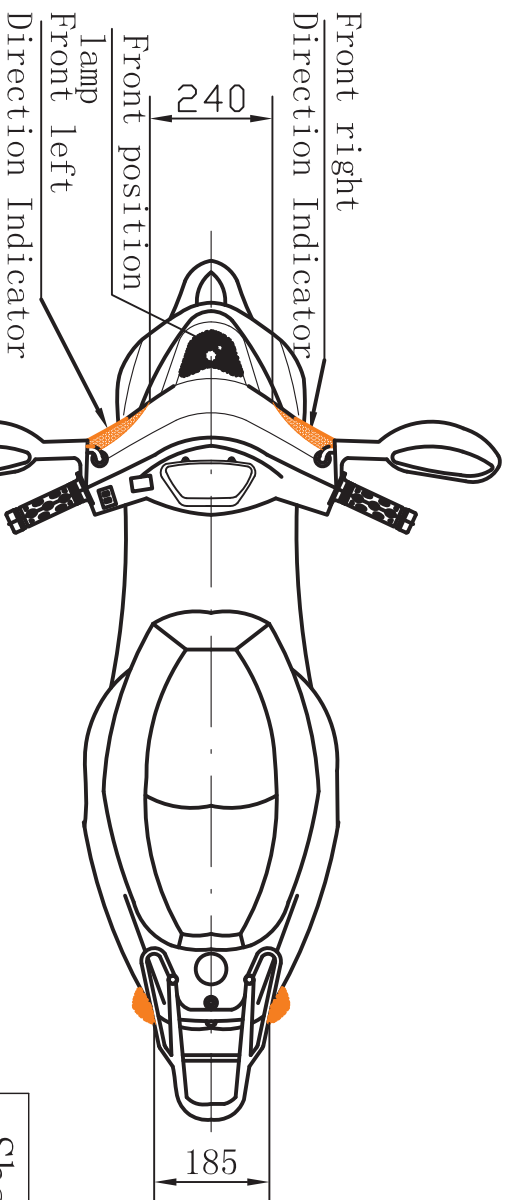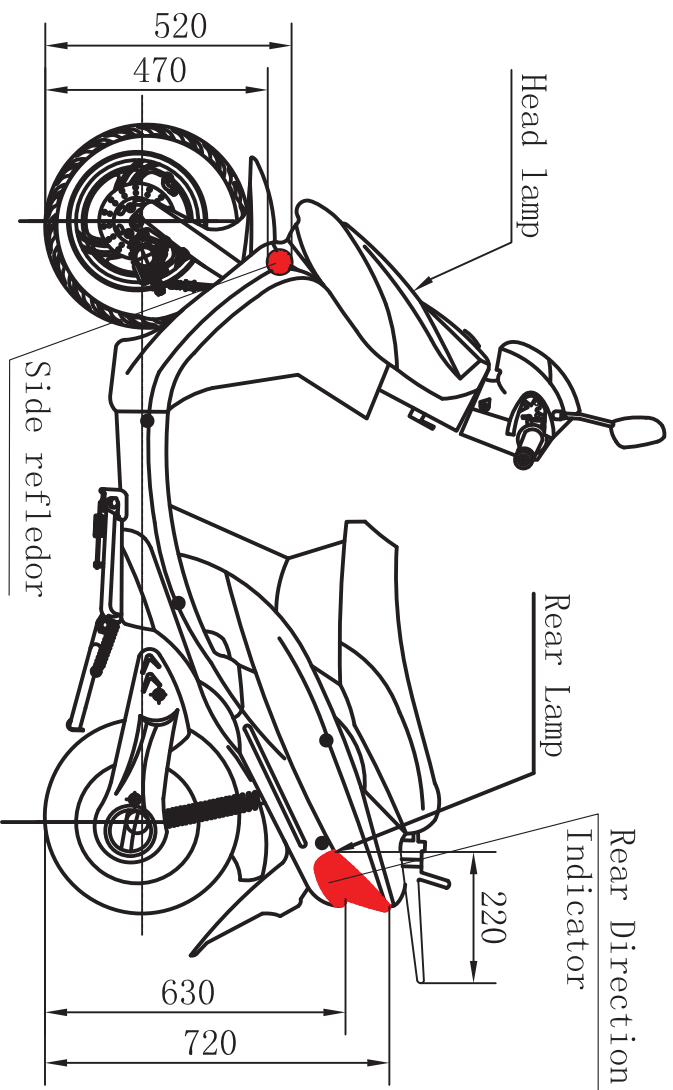


Shanghai Jmstar Motorcycle Co., Ltd


MGY-11-E Location of Lights

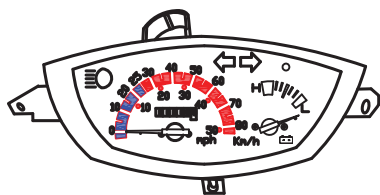






(2/3/4/5) 25km/h

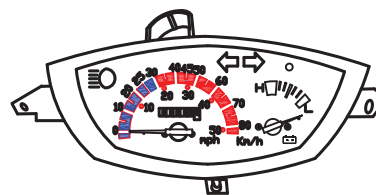

(N/P/W/R) 30km/h

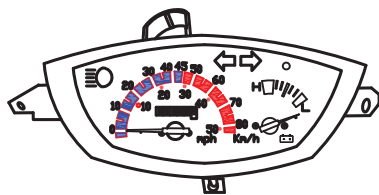

(C/D/E/F) 45km/h

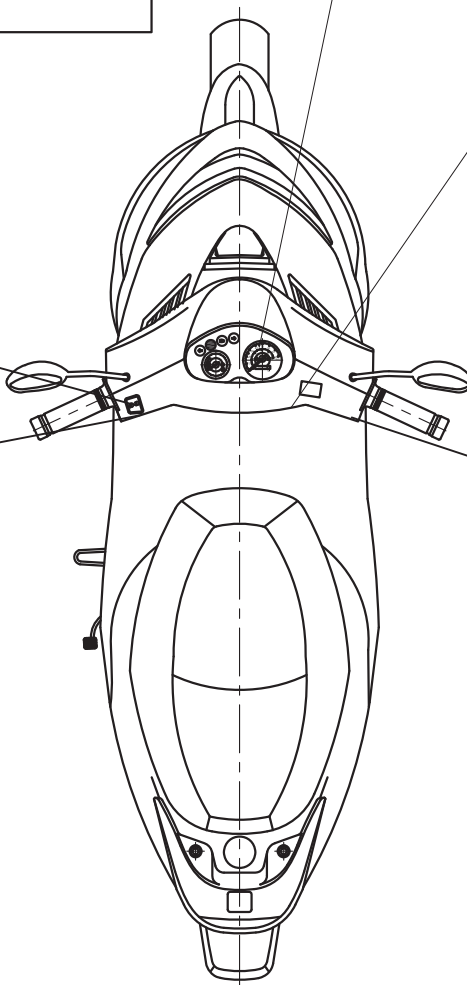


IDIADA

Exp.n.: B1105014


Shanghai Jmstar Motorcycle Co., Ltd

MGY-12-A






Controls Telltales and Indicators



(2/3/4/5) 25km/h




(N/P/W/R) 30km/h

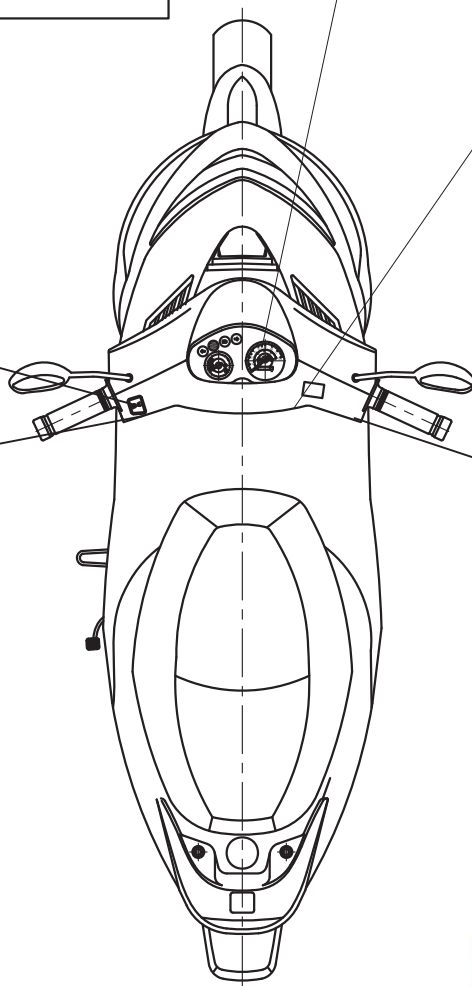


IDIADA
Exp.n.: B1105014


Shanghai Jmstar Motorcycle Co., Ltd	
MGY-12-B	Controls Telltales and Indicators

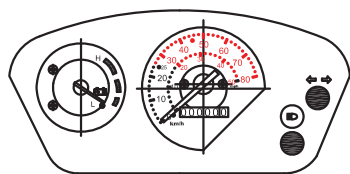





(2/3/4/5) 25km/h



(N/P/W/R) 30km/h

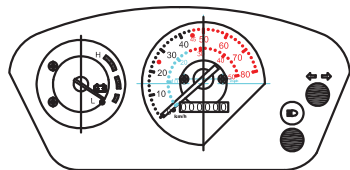

(C/D/E/F) 45km/h

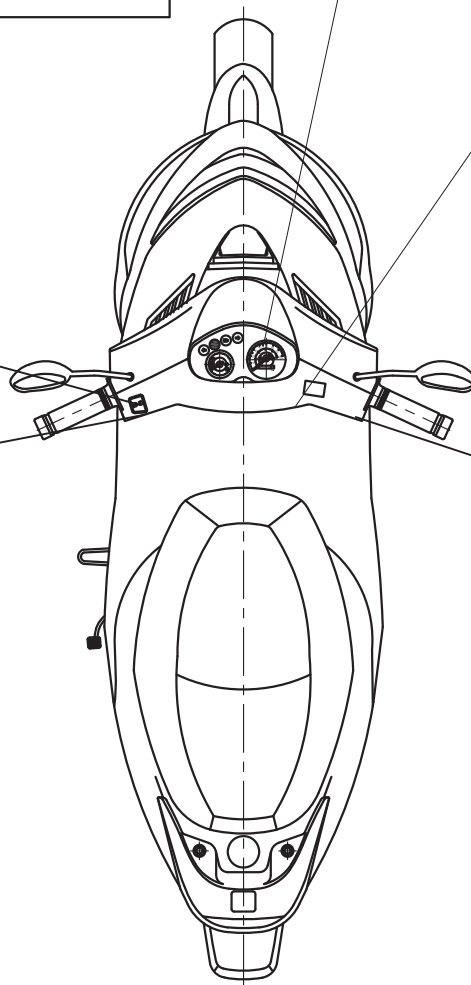


IDIADA


Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co., Ltd


MGY-12-C/D Controls Telltales and Indicators







(2/3/4/5) 25km/h



(N/P/W/R) 30km/h



(C/D/E/F) 45km/h

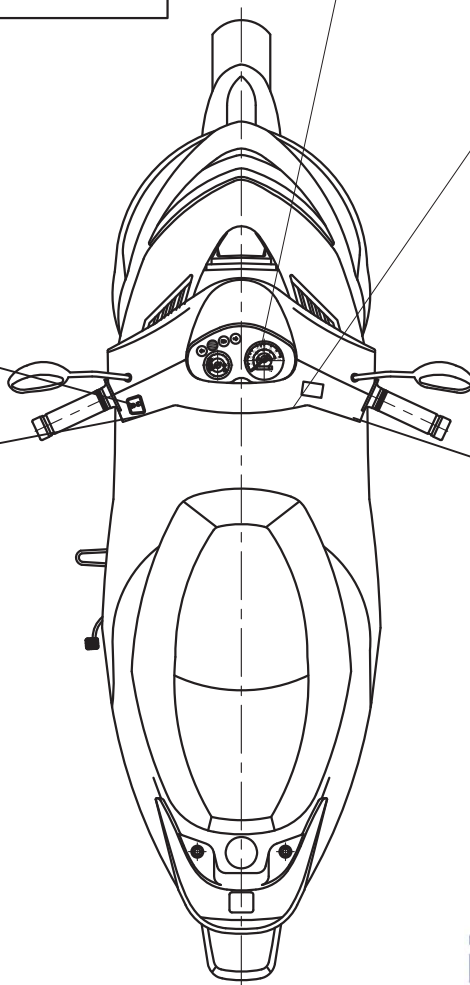


IDIADA
Exp.n.: B1105014


Shanghai Jmstar Motorcycle Co., Ltd

MGY-12-E

Controls Telltales and Indicators

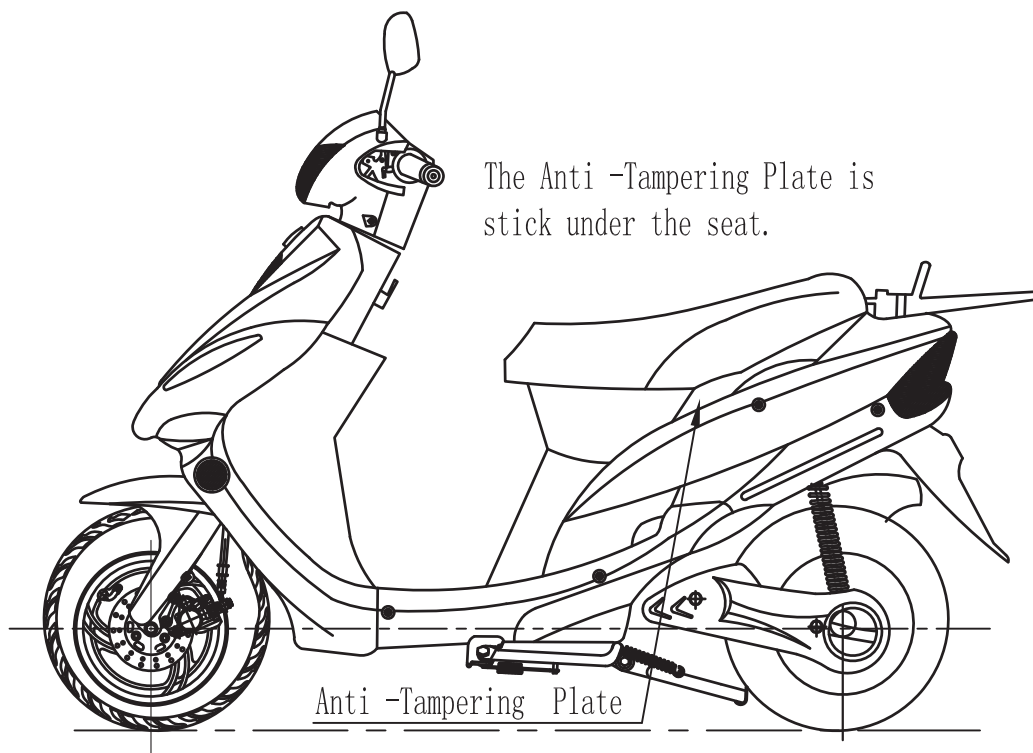

TRADE NAME: *Make
 VEHICLE CATEGORY: A

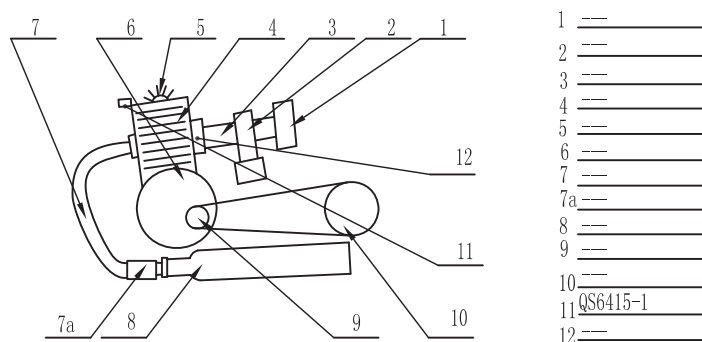

50

60


Character Height:2.5mm

*Make: JMSTAR, JONWAY, SHENKE, HUIBANG


Maximum speed of vehicle:25km/h

IDIADA
 Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd	
MGY-19-1 (2/3)	Anti-tampering Plate

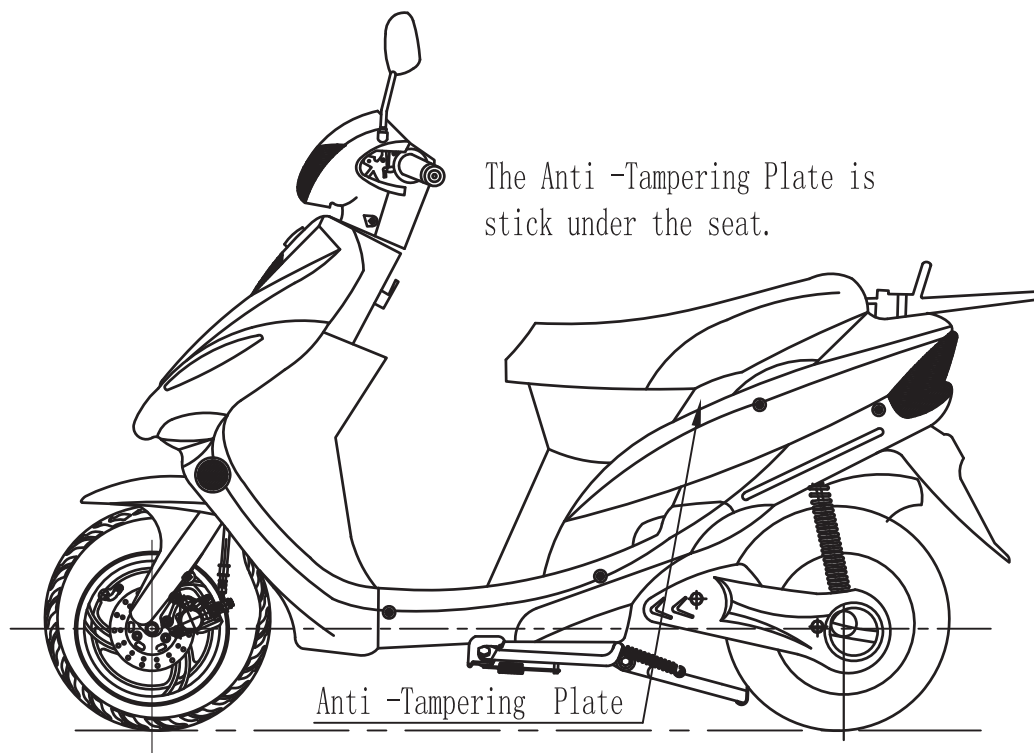

TRADE NAME: *Make
VEHICLE CATEGORY: A

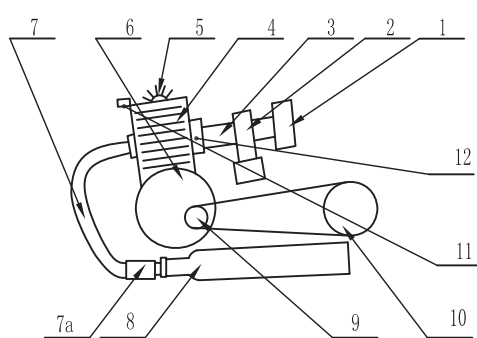

- 1 ---
- 2 ---
- 3 ---
- 4 ---
- 5 ---
- 6 ---
- 7 ---
- 7a ---
- 8 ---
- 9 ---
- 10 ---
- 11 QS6415-2
- 12 ---

60

50

Character Height:2.5mm


*Make: JMSTAR, JONWAY, SHENKE, HUIBANG

Maximum speed of vehicle:30km/h


IDIADA
Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-19-2 (N/P) Anti-tampering Plate

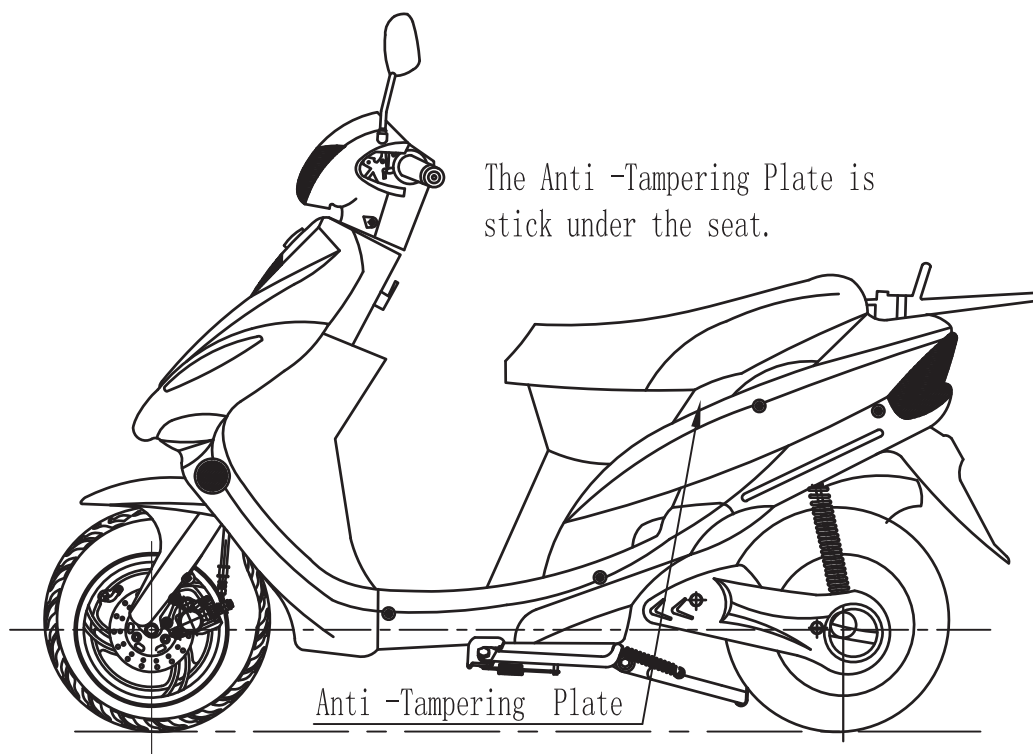

TRADE NAME: *Make
VEHICLE CATEGORY: A

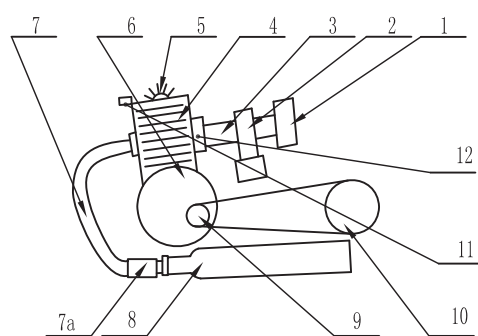

- 1 ---
- 2 ---
- 3 ---
- 4 ---
- 5 ---
- 6 ---
- 7 ---
- 7a ---
- 8 ---
- 9 ---
- 10 ---
- 11 QS6420
- 12 ---

50

60

Character Height:2.5mm

*Make: JMSTAR, JONWAY, SHENKE, HUIBANG


Maximum speed of vehicle:45km/h

IDIADA


Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-19-3 (E/F) Anti-tampering Plate

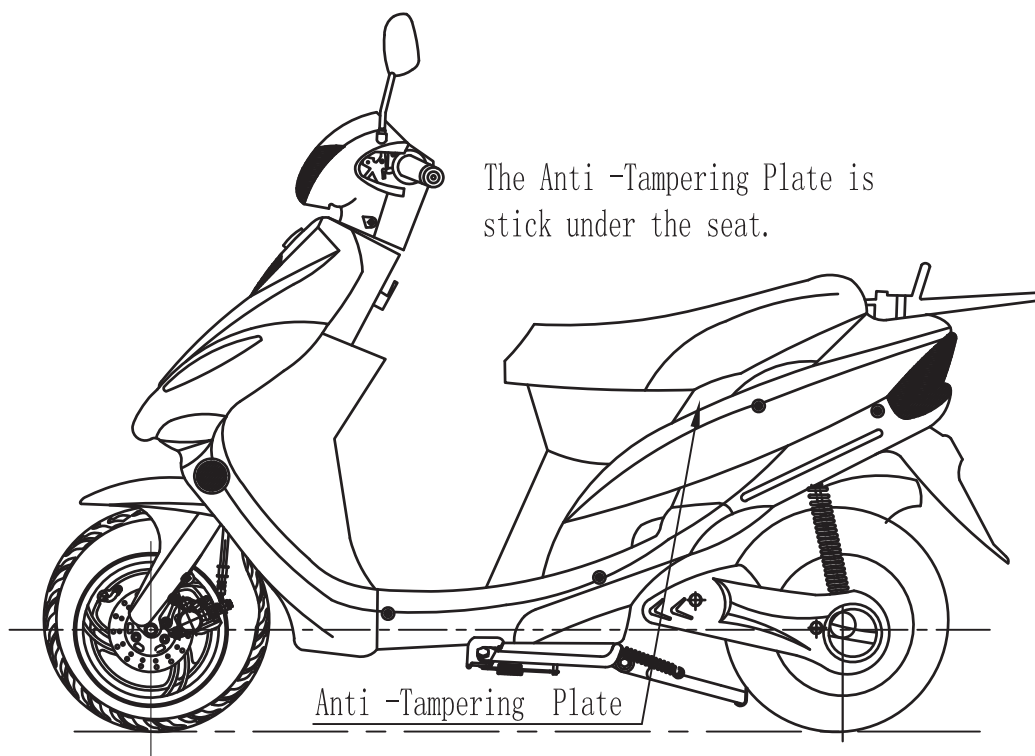

TRADE NAME: *Make
VEHICLE CATEGORY: A

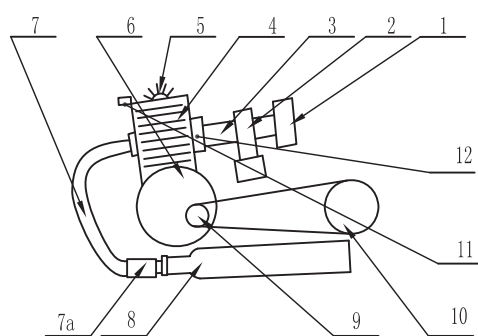

- 1 ---
- 2 ---
- 3 ---
- 4 ---
- 5 ---
- 6 ---
- 7 ---
- 7a ---
- 8 ---
- 9 ---
- 10 ---
- 11 QS6420-1
- 12 ---

Character Height:2.5mm


*Make: JMSTAR, JONWAY, SHENKE, HUIBANG

Maximum speed of vehicle:25km/h


iDiADA
Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-19-4 (4/5) Anti-tampering Plate

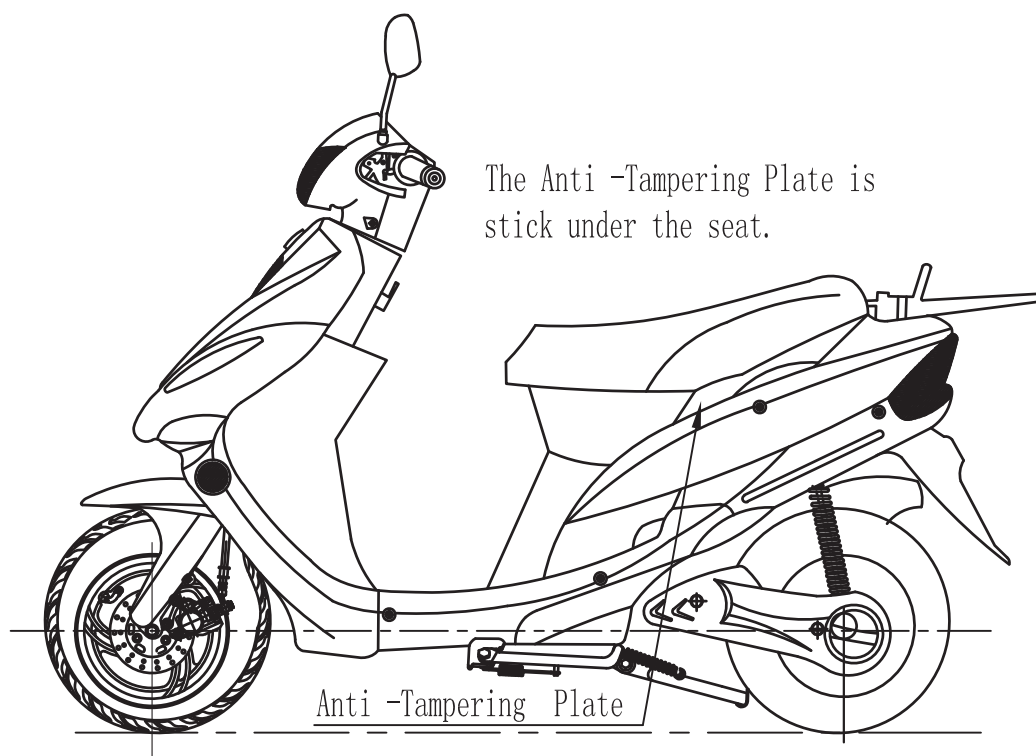

TRADE NAME: *Make
VEHICLE CATEGORY: A

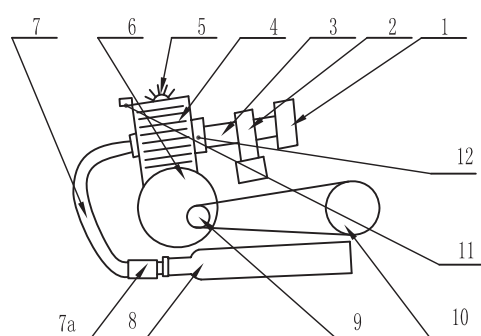

- 1 ---
- 2 ---
- 3 ---
- 4 ---
- 5 ---
- 6 ---
- 7 ---
- 7a ---
- 8 ---
- 9 ---
- 10 ---
- 11 QS6420-2
- 12 ---


Character Height:2.5mm

*Make: JMSTAR, JONWAY, SHENKE, HUIBANG


Maximum speed of vehicle:30km/h

IDIADA
Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd	
MGY-19-5 (W/R)	Anti-tampering Plate

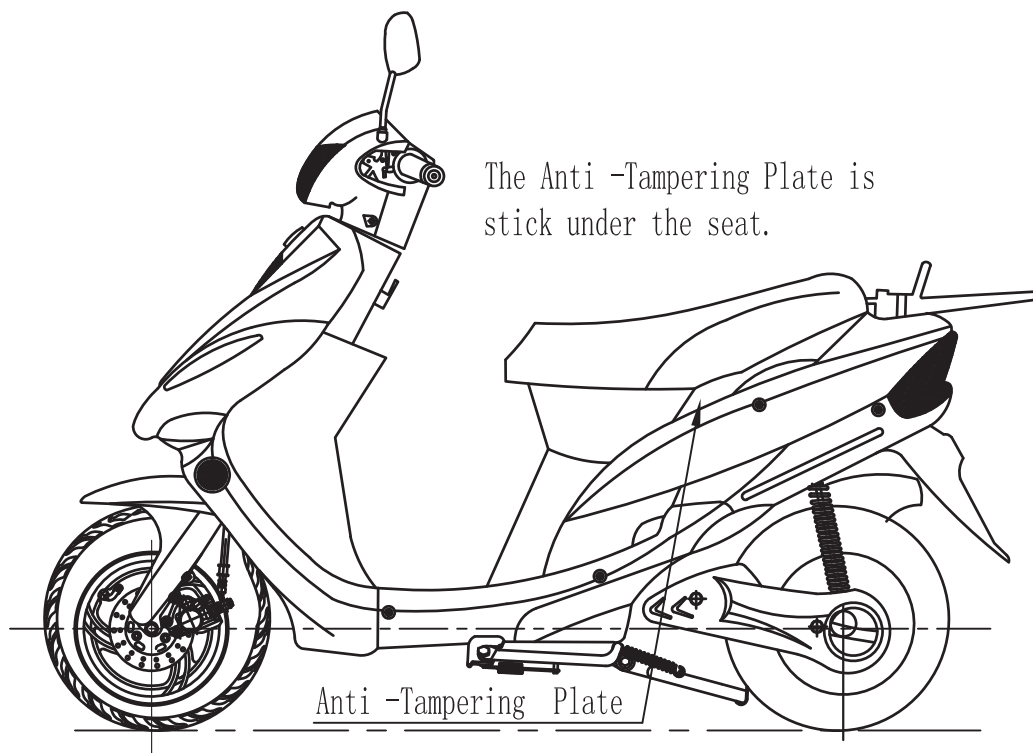

TRADE NAME: *Make
VEHICLE CATEGORY: A

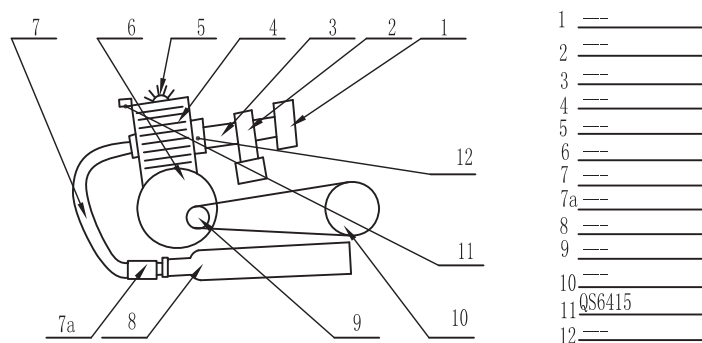

60

50

Character Height:2.5mm

*Make: JMSTAR, JONWAY, SHENKE, HUIBANG


Maximum speed of vehicle:45km/h

IDIADA
Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-19 (C/D)

Anti-tampering Plate

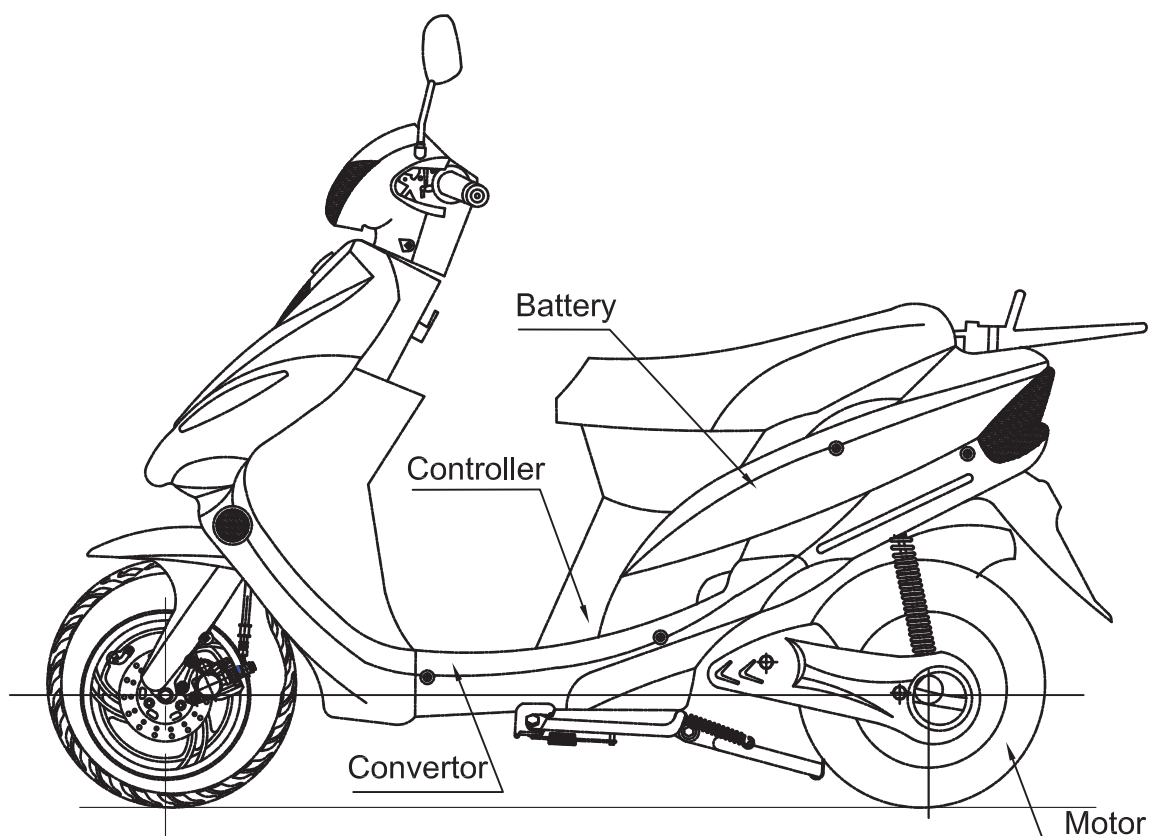

All the electric devices are covered by anti-radio papers.

Motor : make:QUANSHUN or JONWAY or JMSTAR
type:64V/1500W

Controller: make:QUANSHUN or JONWAY or JMSATR
type: QS6415

Battery (Li-ion): make:Thunder Sky
type: LFP20AHA

Battery (Silicone): make:BONENG
type: 6-DZM-20


Convertor: make:YONGHENG
type:DC-DC

IDIADA

Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-20-1 (C/D) Anti-radio Interference

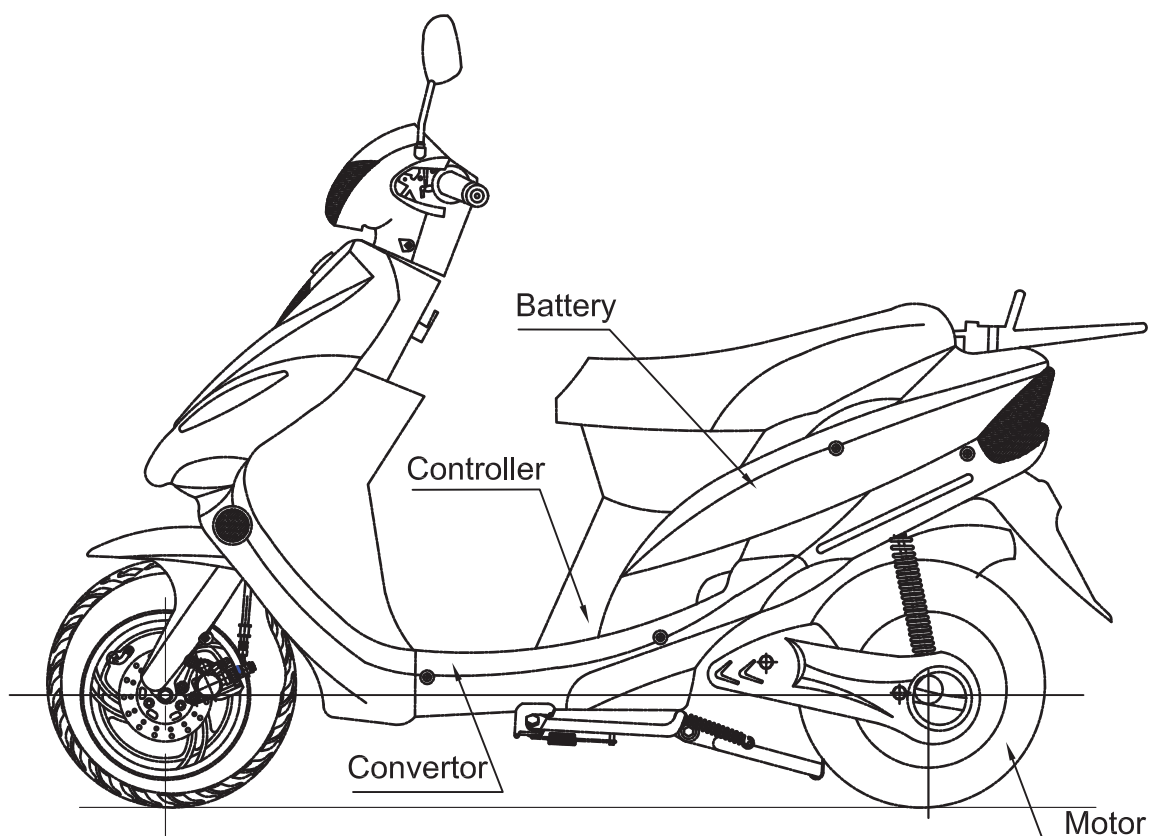

All the electric devices are covered by
anti-radio papers.

Motor : make:QUANSHUN or JONWAY or JMSTAR
type:64V/2000W

Controller: make:QUANSHUN or JONWAY or JMSTAR
type: QS6420

Battery (Li-ion) : make:Thunder Sky
type: LFP20AHA

Battery (Silicone) : make:BONENG
type: 6-DZM-20


Convertor: make:YONGHENG
type:DC-DC

IDIADA

Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-20-2 (E/F) Anti-radio Interference

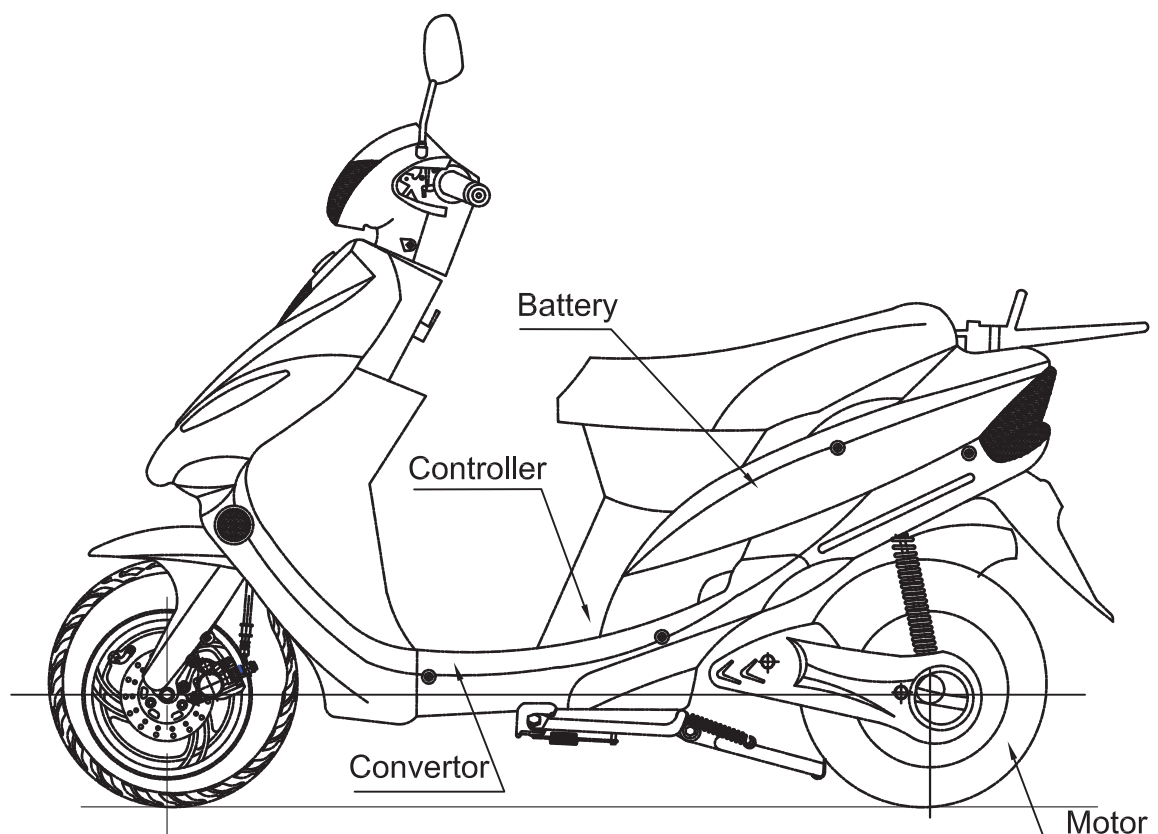

All the electric devices are covered by anti-radio papers.

Motor : make:QUANSHUN or JONWAY or JMSTAR
type:64V/1500W

Controller: make:QUANSHUN or JONWAY or JMSTAR
type: QS6415-1

Battery (Li-ion): make:Thunder Sky
type: LFP20AHA

Battery (Silicone): make:BONENG
type: 6-DZM-20


Convertor: make:YONGHENG
type:DC-DC

IDIADA

Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-20-3(2/3) Anti-radio Interference

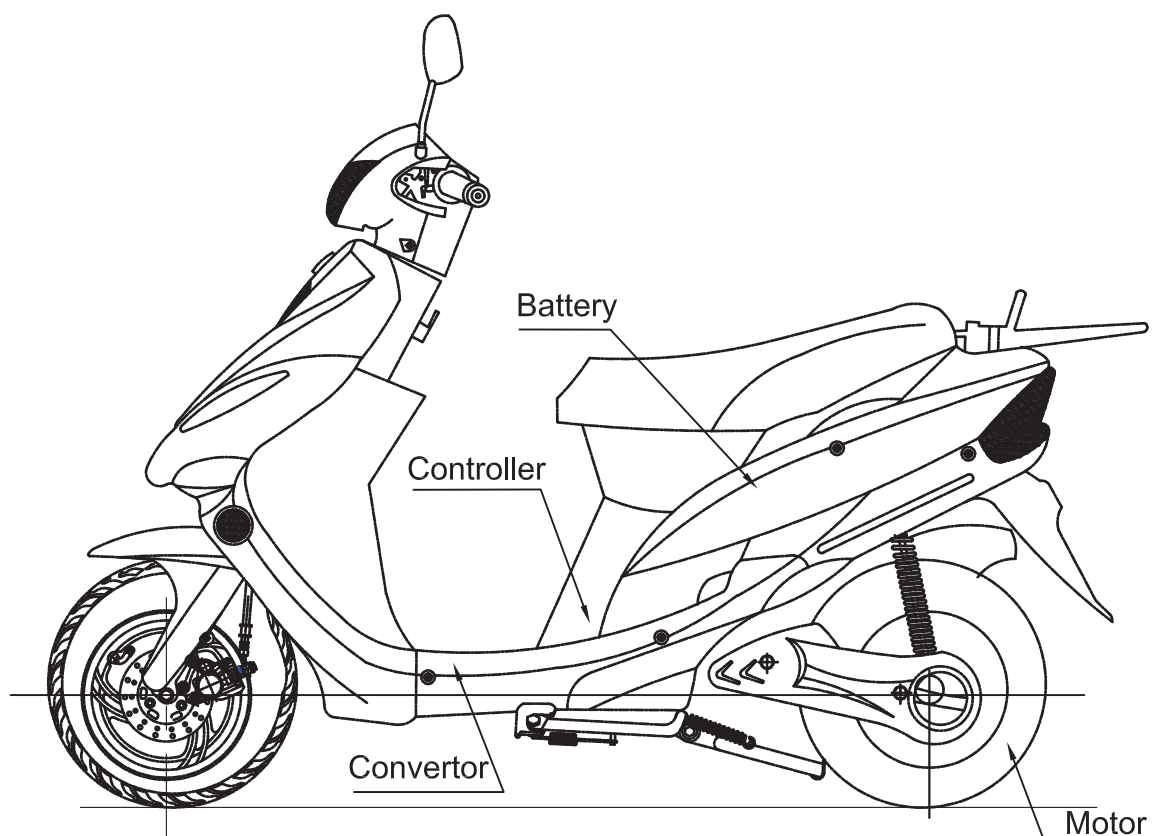

All the electric devices are covered by anti-radio papers.


Motor	:	<u>make:QUANSHUN or JONWAY or JMSTAR</u> <u>type:64V/2000W</u>
Controller:		<u>make:QUANSHUN or JONWAY or JMSTAR</u> <u>type: QS6420-1</u>
Battery (Li-ion):		<u>make:Thunder Sky</u> <u>type: LFP20AHA</u>
Battery (Silicone):		<u>make:BONENG</u> <u>type: 6-DZM-20</u>
Convertor:		<u>make:YONGHENG</u> <u>type:DC-DC</u>

IDIADA

Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-20-4(4/5) Anti-radio Interference

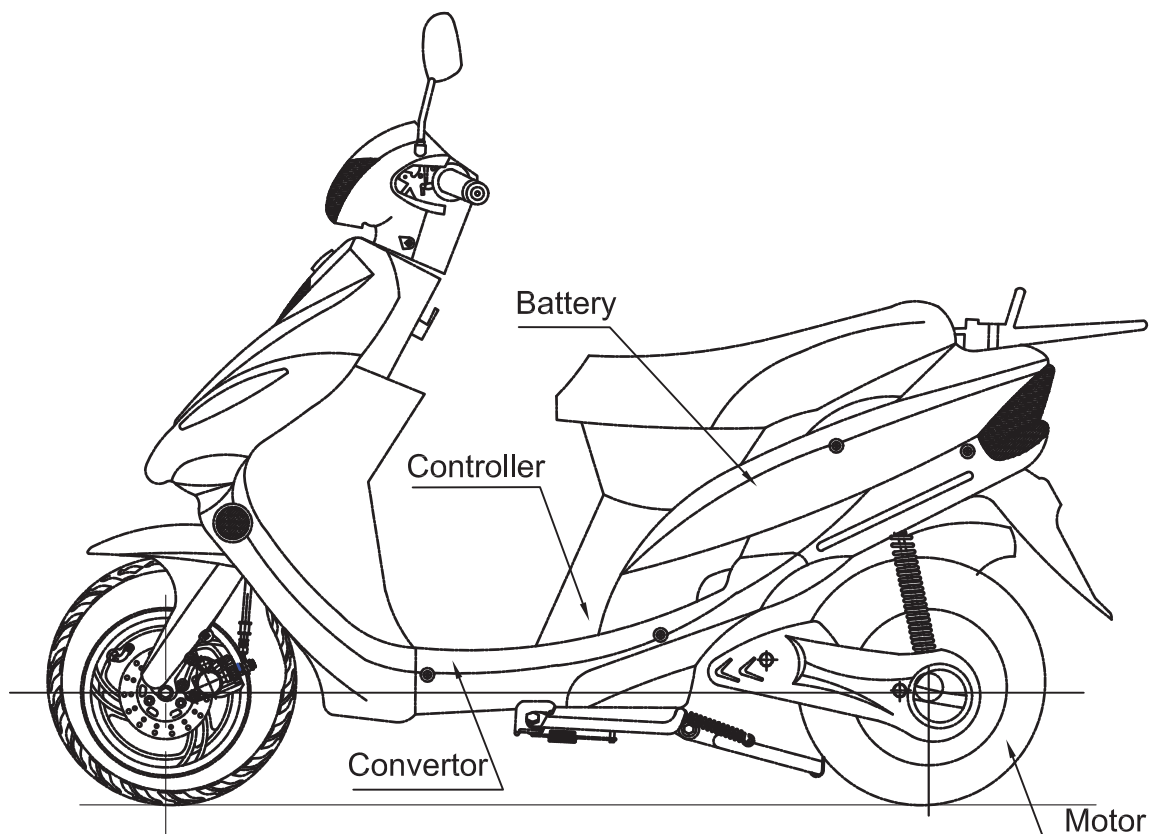

All the electric devices are covered by anti-radio papers.


Motor	:	<u>make:QUANSHUN or JONWAY or JMSTAR</u> type:64V/1500W
Controller:		<u>make:QUANSHUN or JONWAY or JMSTAR</u> type: QS6415-2
Battery (Li-ion):		<u>make:Thunder Sky</u> type: LFP20AHA
Battery (Silicone):		<u>make:BONENG</u> type: 6-DZM-20
Convertor:		<u>make:YONGHENG</u> type:DC-DC

IDIADA

Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-20-5 (N/P) Anti-radio Interference

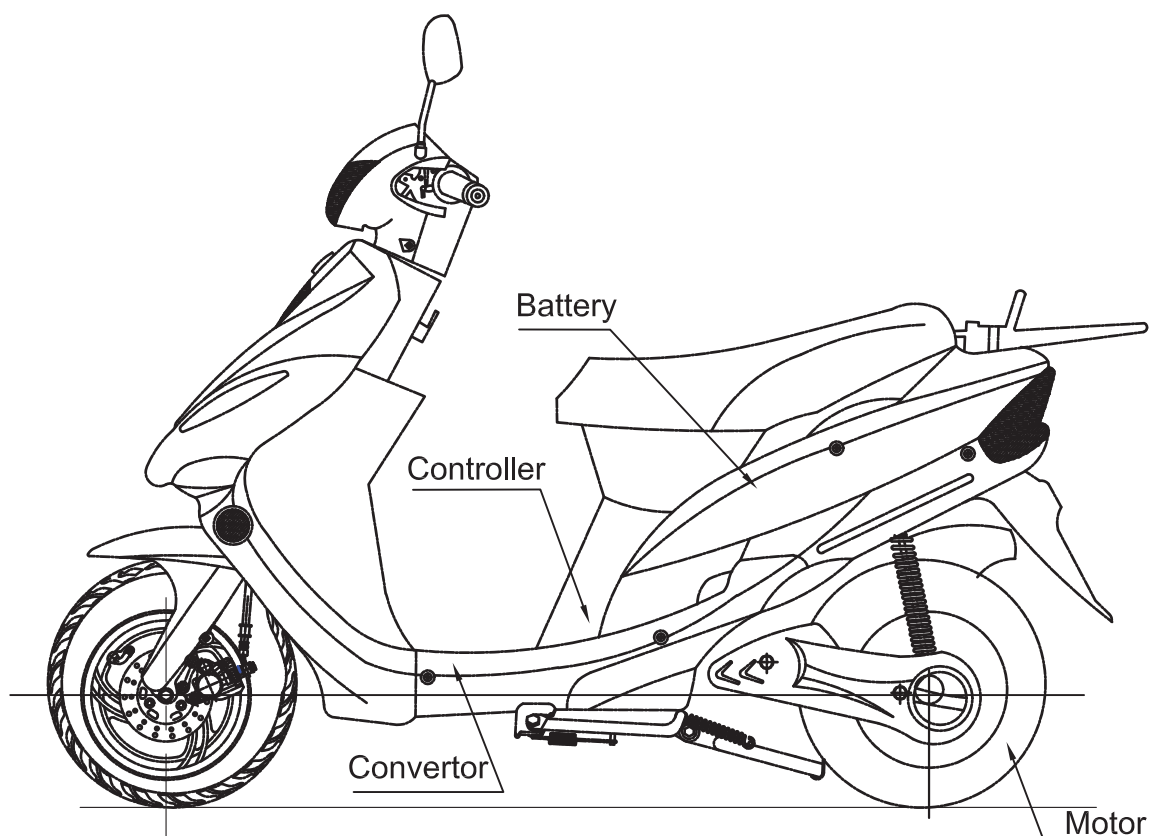

All the electric devices are covered by anti-radio papers.


Motor	:	<u>make:QUANSHUN or JONWAY or JMSTAR</u> <u>type:64V/2000W</u>
Controller:		<u>make:QUANSHUN or JONWAY or JMSTAR</u> <u>type: QS6420-2</u>
Battery (Li-ion):		<u>make:Thunder Sky</u> <u>type: LFP20AHA</u>
Battery (Silicone):		<u>make:BONENG</u> <u>type: 6-DZM-20</u>
Convertor:		<u>make:YONGHENG</u> <u>type:DC-DC</u>

IDIADA

Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-20-6 (W/R) Anti-radio Interference

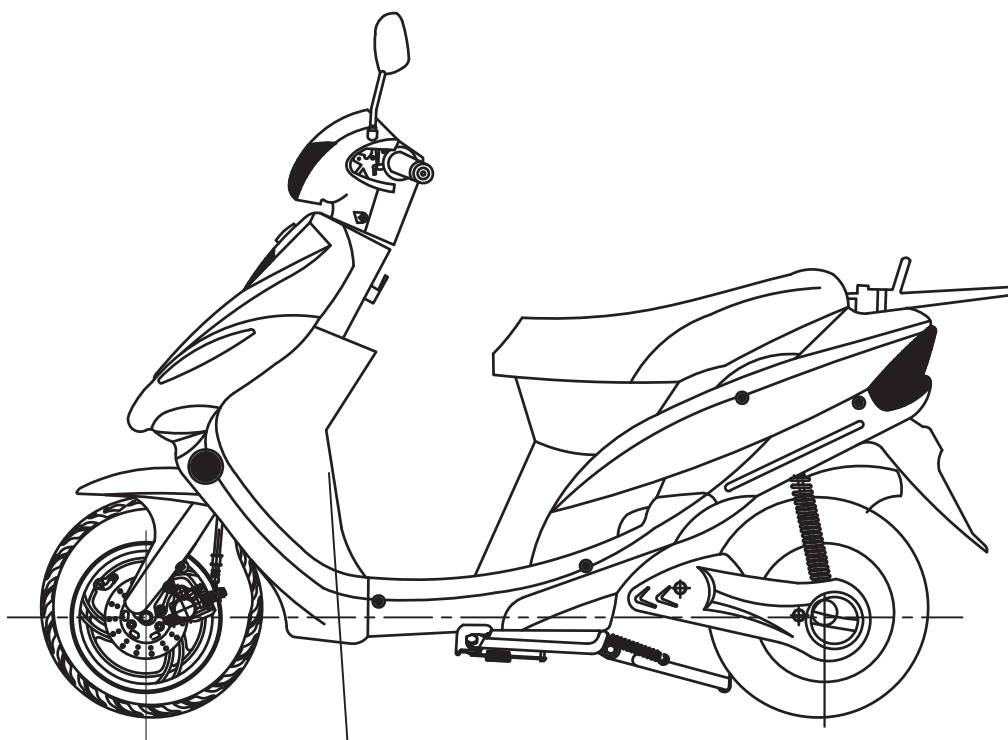

VIN: LJ4MGY???*****

LJ4	MGY	?	?	?	*	*	*****	
								Production Serial Number
								Assemble Plant
								Production year
								Check Number
								Version
								Variant: motor delivery capacity
								electric motorcycle Type
								WMI

From One:Electric Motorcycle(Bike) Definition Code

Definition	Electric Motorcycle	Electric Bike
Code	M	B

From Two:CAPACITY OF Motor(kw) and TYPE OF BATTERY CODE

Capacity of motor(kw)	1000	1000	1500	1500	2000	2000	2500	2500	3000	3000
Type of battery	Li-ion	Silicone	Li-ion	Silicone	Li-ion	Silicone	Li-ion	Silicone	Li-ion	Silicone
Code (45km/h)	A	B	C	D	E	F	G	H	J	K
Code (25km/h)	0	1	2	3	4	5	6	7	8	9
Code (30km/h)	L	M	N	P	W	R	S	T	U	V

DiADA
Exp.n.: B1105014

Shanghai Jmstar Motorcycle Co.,Ltd

MGY-21

VIN Structure



EC CERTIFICATE OF CONFORMITY

The undersigned,

hereby certifies that the following vehicle:

- | | | |
|-------|---|---|
| 0.1. | Make: | JMSTAR |
| 0.2. | Type: | MGY |
| | Variant: | D |
| | Version: | A |
| 0.2.1 | Commercial name(s) (where appropriate): | n.a. |
| 0.4 | Vehicle category: | L1e |
| 0.4.1 | Vehicle category according to Directive 97/24/EC, Chapter 7 | A |
| 0.5. | Name and address of the manufacturer: | SHANGHAI JMSTAR MOTORCYCLE CO., LTD.
Fengjing Industry Area, Jinshan District,
Shanghai, China 201501 |
| 0.6. | Location of the statutory plate: | R X: 750 Y: 110 Z: 250 |
| | Vehicle identification number: | |
| 0.7. | Location of the vehicle identification number on the chassis: | R X: 300 Y: 3 Z: 460 |

Conforms in all respects to the type described in EC type-approval

— EC type-approval number:

— Dated:

The vehicle can be permanently registered without requiring any further approvals, for driving on the right and ~~left~~ and for using metric/imperial units for the speedometer.

(place)

(date)

(signature)

(Position)

IBIADA
Exp.n.: B1105014



Additional information

1.	Number of axles:	2	and wheels:	2	
3.	Wheel base:				1225mm
6.1	Length:				1700mm
7.1	Width:				660mm
8.	Height:				1060mm
12.1.	Mass of the vehicle (with bodywork) in running order:				99 kg
12.2.	Unladen mass of the vehicle:				99 kg
14.1.	Technically permissible maximum laden mass:				254 kg
14.2	Distribution of this mass among the axles:	1.	90 kg	2.	164kg
14.3.	Technically permissible mass on each axle:	1.	90 kg	2.	164kg
17.	Maximum mass of trailer:	N.A.	(braked):	kg	(unbraked): kg
19.1.	Maximum vertical load at the coupling point for a trailer:				kg
20.	Engine manufacturer:	TAIZHOU LUQIAO QUANSHUN ALUMINIUM CO., LTD.			
21.	Engine type as marked on the engine:	64V/1500W			
21.2.	Engine number:				
22.	Working principle:	Electric/ spark ignition/compression ignition, four/two stroke			
23.	Number and arrangement of cylinders:	---			
24.	Cylinder capacity:	--cm ³			
25.	Fuel:	n.a.			
26.	Maximum net power or maximum continuous rated power:	1.5 kW			
26.1.	Ratio: maximum net power or maximum continuous rated power/mass of the vehicle in running order:	0.015(kW/kg)			
28.	Gearbox (type):	N.A			
29.	Gear ratios:	N.A			
32.	Tyre size designation:	Axle 1: 3.5-10		Axle 2: 3.5-10	
37.	Body: yes /no				
41.	Number and configuration of doors:	n.a.			
42.1	Number and position of seats:	r ₁ : 1C r ₂ : 1C			
43.1	Approval mark of coupling device, if fitted:	N.A.			
44.	Maximum speed:	45km/h			
45.	Sound level:	97/24/9/II/*2006/120/EC			
	Stationary:	--dB(A)	at engine speed:		-- min ⁻¹
	Drive-by:	--dB(A)			
46.	Exhaust emissions:	97/24/5/I/*2006/120/EC			
	Type I test:	CO:	--g/km	HC:	g/km
		NO _x :	g/km	HC+ NO _x :	--g/km
	Type II test:	for mopeds: CO :	--g/min	HC:	--g/min
		for motorcycles and tricycles: CO :			% vol
	Visible air pollution caused by an engine with compression ignition:				
	— corrected value of absorption coefficient :	N.A.m ⁻¹			
47.	Fiscal power or national code number (s) :				
	Belgium:	Bulgaria:	Czech Republic:	Denmark:	Germany:
	Estonia:	Greece:	Spain:	France:	Ireland:
	Italy:	Cyprus:	Latvia	Lithuania	Luxembourg:
	Hungary:	Malta:	Netherlands:	Austria:	Poland
	Portugal:	Romania:	Slovenia:	Slovakia:	Finland:
	Sweden:	United kingdom:			
50.	Remarks:				
51.	Exemptions :				

Exp.n.: B1103014